

# OTDR/iOLM Reference Poster



## The Evolution of OTDR Testing

An optical time-domain reflectometer (OTDR) is a tool of choice to test and troubleshoot fiber networks. However, the level of complexity involved requires a great amount of knowledge and expert skills to use it efficiently. Thankfully, today's OTDRs offer a variety of automated functions helping the user perform faster, more reliable fiber characterization. This reference poster will help you stay on top of OTDR technology. More specifically, this poster will help you:

- Refresh OTDR fundamentals
- Understand the main components of an OTDR trace
- Demystify key OTDR parameters
- Benefit from useful tips
- Discover a revolutionary test method: EXFO's iOLM

## OTDR Fundamentals

The OTDR couples a laser and a detector, with an internal clock and a pulse generator. The OTDR sends a pulse of laser light into one side of the optical fiber. The light is reflected back from the fiber, connectors, splices and other components on the link to the OTDR. Each measurement in time is plotted onto a graph depicting power in function of distance. Since the speed of light in a fiber is known, we can calculate distance given the time. We can thus obtain the total length of the fiber and the location of any events on the link.


**Why Use an OTDR?**  
An OTDR is a single-ended test equipment that provides an accurate and complete end-to-end link validation. As opposed to the simple light source and power meter test method, the OTDR can identify and locate any potential faults or breaks that could impact your network performance. No additional tool or test are needed.

THE OTDR MEASURES:	THE OTDR PROVIDES:
Total loss	Link component characterization
Event loss	Loss, reflectance and attenuation measurements
Optical return loss	Potential fault highlights
Event location	Break locations
Fiber length	

## Key Test Parameters

The OTDR function is a balance between power (dynamic range) and resolution (dead zone). Three interacting parameters may influence test results:

- Duration:** allows to increase signal-to-noise ratio (SNR)
- Distance range:** sets fiber length and repetition rate
- Pulse width:** determines acquisition power and resolution

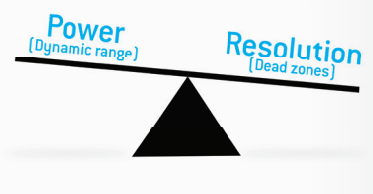

- How to Set Up Your OTDR**
- Use the file naming and identification features.
  - Use **Automode** to discover the link under test. Based on the results, you may have to manually adjust some test parameters to detect more events.
  - Complete fiber characterization by using **different pulse widths** to find any hidden event undetected by Automode.
    - Use the shortest pulse width to check the **front end** including the first connector of the link.
    - Use larger pulse width to reach **longer distances** and/or to characterize optical splitter (for FTTH/PON).

COMMON ISSUES	WHAT SHOULD YOU DO?
Noisy trace	- Increase averaging time (minimum 45 s) OR - Increase to the next larger pulse width
Events not visible or missing	- Event might be located within the OTDR dead zone, try reducing pulse width to heighten resolution and discriminate closely spaced events
No fiber end	- Adjust distance range to link length - Increase pulse width for more dynamic range
OTDR connector fail	- Inspect OTDR port connector and clean if required - Use launch cable to measure the first connector of the link - Ensure OTDR port connector reflectance is < -45 dB

## Fiber Inspection – The No. 1 Step to Any OTDR Testing

It is well known that bad or dirty connectors in the network are at the root of many problems but did you know that your OTDR/iOLM port is also critical? **Every connector must be inspected and cleaned.** A bad first connector at the OTDR port or launch cable can negatively impact all your test results. It is critical to inspect all connectors manipulated through the test to ensure they are free of any contamination. If dirty, clean properly as per best practices. If damaged, the OTDR must be returned for connector replacement and recalibration.

**Quick Tip**  
Using a fully automated probe will transform the critical inspection phase into a quick and simple one-step process.

**Traditional OTDR Trace**

Dirty connector

**iOLM Link View**

Clean connector

## Launch Cable

Used together with an OTDR or iOLM, the launch cable (also called a pulse suppressor box, dead zone eliminator or dummy fiber) adds a length of fiber between the OTDR and the network's first connector to cover the OTDR's connector dead zone. This enables loss measurement on the first connection of a fiber under test.

**Quick Tip**  
Using a launch cable is good practice. It increases the lifespan of the OTDR connector by reducing the number of matings, thus saving time and money on OTDR connector replacements.


**How**  
The OTDR measures the fiber backscattering level before and after the first connector of the link.

**Length**  
For pulse widths of 100 ns and shorter, the minimum launch cable length recommended is 25 meters. For other pulse widths, use this simplified formula to find the minimum length of the launch cord:

Pulse width in ns divided by 10. Convert to meters. Multiply by 2.  
Examples:  
(Pulse width) 1 μs → 1000 ns / 10 → 100 m X 2 = 200 m → Appropriate launch cable length  
(Pulse width) 50 ns → 50 ns / 10 → 5 m X 2 = 10 m → Round up to 25 m, as minimum recommended length

**Fiber Type**  
It is recommended to use the same type of fiber for the launch cable as the one under test. If you are testing G657 bend-insensitive fibers with a typical G652 standard fiber launch cable, there will be a gain on the first connector of the link—potentially compensating for a high loss connector. You would then get a false positive.

**Receive Cable**  
A receive cable may be used at the far end for last connector measurements. Combined to first connector loss, this gives complete end-to-end loss (equivalent to the result obtained using a light source and a power meter with one jumper length). The continuity of the fiber under test can thus be confirmed.

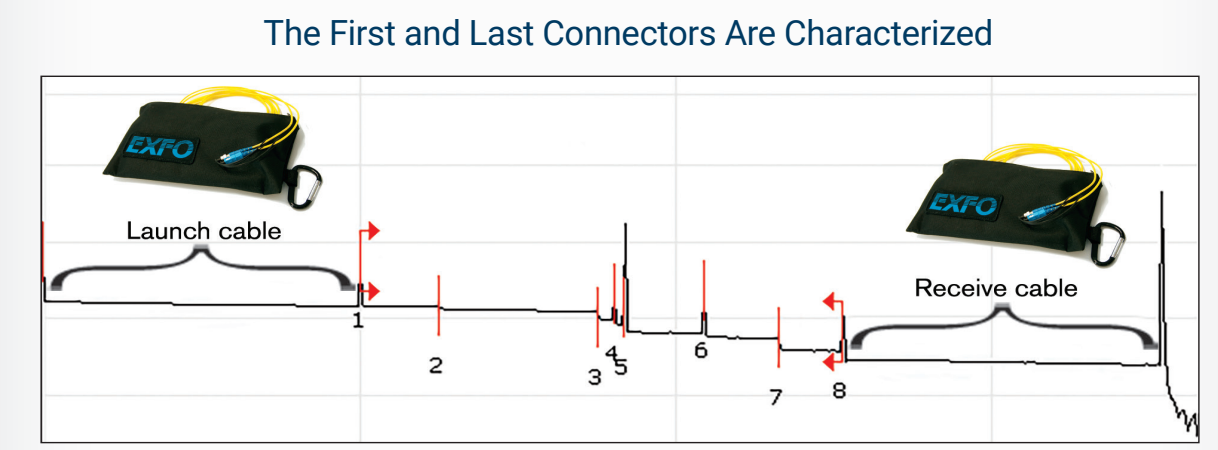


**Multimode (MM) Testing**  
Multimode fibers have a larger core (50 μm or 62.5 μm) than singlemode fibers (9 μm). It is **critical** to properly match the same fiber core of the launch cable to the test unit and network fibers.  
**Multimode fibers types and their usage**  
Fiber type C: 50 μm, OM2, OM3, OM4, OM5—used for data centers with high-speed links  
Fiber type D: 62.5 μm, OM1—legacy deployments in LAN/WAN and in-building cabling

**Multimode Encircled Flux (EF) Launch Conditions**  
For high-speed data networks running under tight loss budget, connector misalignment is a major cause of problems due to quality and tolerance of the connector. Therefore, measuring the first and last connectors of the link is mandatory. Using an external EF conditioner as a launch cable and an appropriate multimode receive cable will provide accurate end-to-end loss results. For more details, refer to TIA-526-14-B and IEC 61280-4-1 Ed. 2.0.

## Dead Zones

- There are two types of dead zones:
- Event dead zone:** the minimum distance after a reflective event where an OTDR can **detect** another event.
  - Attenuation dead zone:** the minimum distance after a reflective event where an OTDR can **accurately measure** the loss of a consecutive event.

Dead zones are influenced by pulse width, reflectance and OTDR response.  
**Reflectance:** higher reflectance (i.e., -45 dB) will increase dead zones; lower reflectance (i.e., -55 dB) enables faster recovery, and hence shorter dead zones.

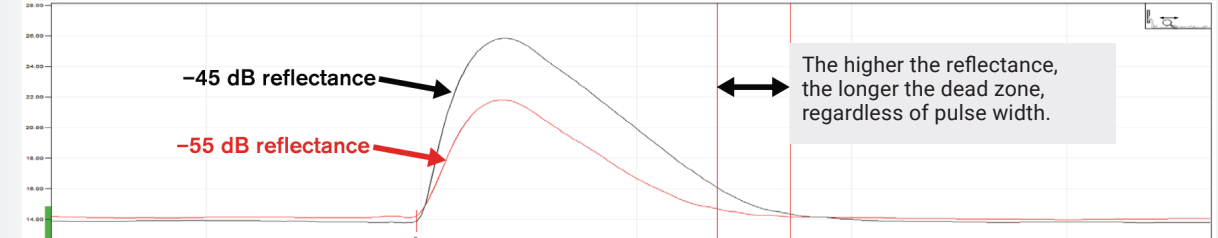


**Quick Tip**  
Clean connectors reduce reflectance, which in turn means shorter dead zones.

Long pulses provide a better dynamic range but less resolution.

Short pulses provide high resolution but less dynamic range.

## Key Components and Trace Analysis

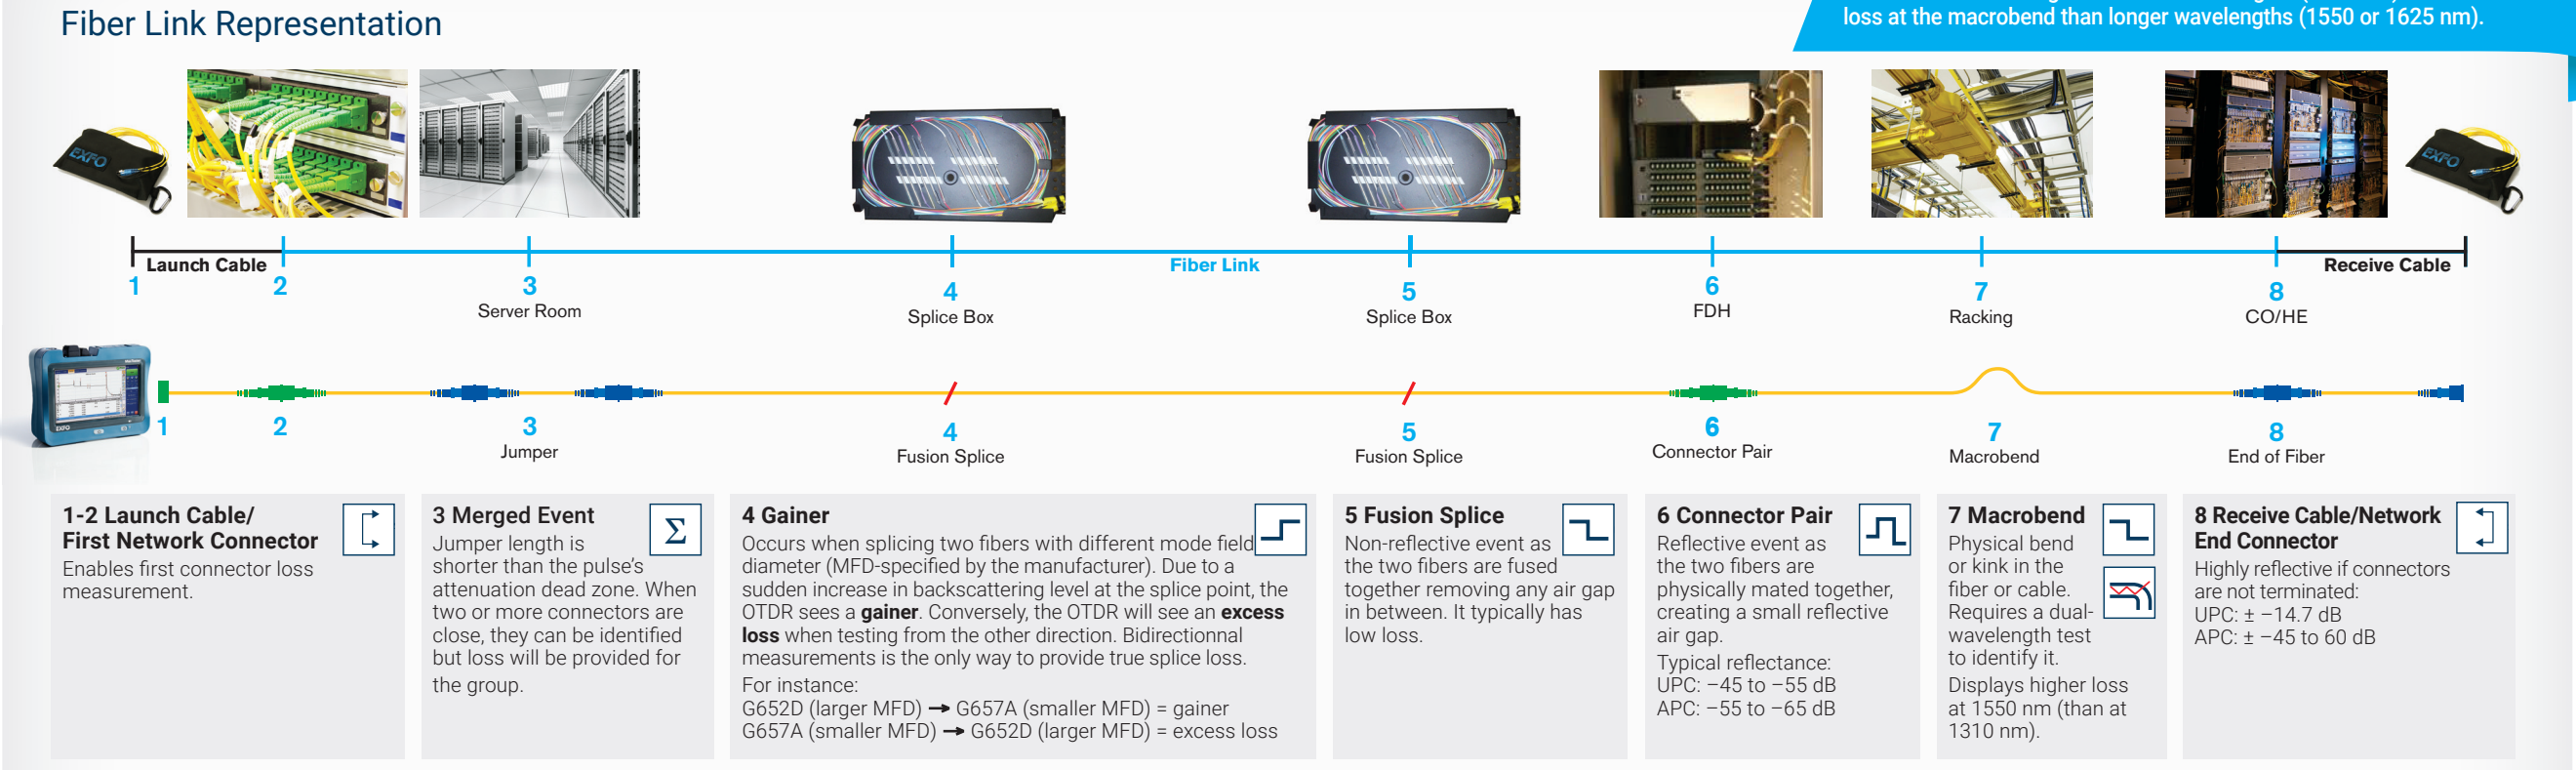

**1-2 Launch Cable/First Network Connector**  
Enables first connector loss measurement.

**3 Merged Event**  
Jumper length is shorter than the pulse's attenuation dead zone. When two or more connectors are close, they can be identified but loss will be provided for the group.

**4 Gainer**  
Occurs when splicing two fibers with different mode field diameter (MFD) specified by the manufacturer. Due to a sudden increase in backscattering level at the splice point, the OTDR sees a **gainer**. Conversely, the OTDR will see an **excess loss** when testing from the other direction. Bidirectional measurements is the only way to provide true splice loss.  
For instance: G652D (larger MFD) → G657A (smaller MFD) = gainer  
G657A (smaller MFD) → G652D (larger MFD) = excess loss

**5 Fusion Splice**  
Non-reflective event as the two fibers are fused together removing any air gap in between. It typically has low loss.

**6 Connector Pair**  
Physical event as the two fibers are physically mated together, creating a small reflective air gap.  
Typical reflectance: UPC: ± -45 to -55 dB  
APC: -55 to -65 dB

**7 Macrobend**  
Physical bend or kink in the fiber or cable. Requires a dual-wavelength test to identify it. Displays higher loss at 1550 nm (than at 1310 nm).

**8 Receive Cable/Network End Connector**  
Highly reflective if connectors are not terminated.  
UPC: ± -14.7 dB  
APC: ± -45 to 60 dB

**Did You Know?**  
The unit can automatically identify macrobends by comparing the results between two wavelengths. Shorter wavelengths (1310 nm) will show less loss at the macroband than longer wavelengths (1550 or 1625 nm).

**Key Test Parameters**

- Test Wavelengths:** Use two or more wavelengths to find macrobends.
- Distance Range:** Adjust the range to your link length (adding 10-15% for optimal test results).
- Pulse Width:** Short pulse (3 ns) → high resolution, short dead zones, lower dynamic range  
Long pulse (20 μs) → Lower resolution, long dead zones, high dynamic range
- Duration:** Quick five-second acquisition can be used to find fiber breaks. For more accurate results, durations of 30-45 seconds are recommended.
- Automode:** Automatically sets the distance range, duration and best compromised pulse width for the link under test. Recommended for discovering the link under test or fiber breaks.

## There Are No Ideal Settings

When testing with an OTDR, it is key to determine optimum parameters providing enough dynamic range with the highest resolution possible. To compensate OTDR technology limitations, **more than one OTDR trace** is often required to find all the events on the link.

Using different **pulse widths** and **multiple wavelengths** overcomes this limitation.

- 1- SHORT PULSE**  
To measure the front-end of your link: high resolution, not enough dynamic range to measure through the splitter.
- 2- MEDIUM PULSE**  
To measure high loss splitters: best compromise between resolution and dynamic range.
- 3- LONG PULSE**  
To reach the fiber end and get an accurate end-to-end loss measurement: high dynamic range, lower resolution.

## Choose the Right OTDR

Each fiber optic application has its specific testing requirements. The right OTDR must be used for the right purpose. OTDRs can be manufactured to provide more resolution, more power, dedicated wavelengths or any other specific aspect to optimize your test results.

APPLICATIONS	TEST EQUIPMENT REQUIREMENTS
LAN/WAN DATA CENTERS ENTERPRISE/PRIVATE NETWORKS P2P ACCESS	<ul style="list-style-type: none"> <li>Short dead zones to locate closely spaced events</li> <li>Multimode and singlemode testing in a single unit</li> <li>Encircled Flux (EF) multimode launch conditions for maximum loss measurement accuracy</li> <li>Single-button certification with clear "go/no-go" status</li> <li>On-board pass/fail thresholds compliant with the latest international standards (including TIA-568, ISO11801) for data center certification</li> </ul>
FTTA REMOTE RADIO HEAD (RRH) DAS/SMALL CELLS CELL BACKHAUL CATV	<ul style="list-style-type: none"> <li>Dynamic range optimized for troubleshooting performance and accuracy on short links</li> <li>Automated bidirectional testing feature to certify Rx/Tx cable in one go</li> </ul>
FTTX LAST-MILE FTTX/PON FTTH/MDU PASSIVE OPTICAL LAN (POL) SHORT METRO	<ul style="list-style-type: none"> <li>Dynamic range and resolution optimized at intermediate pulse widths for accurate 1x128 splitter detection and measurement</li> <li>In-service testing with filtered 1625 or 1650 nm wavelength</li> <li>Unique in-line power meter allowing checking the optical power at 1490/1550nm before troubleshooting with the OTDR. This on a single port with no disconnection between both measurement to ensure a smooth workflow</li> <li>39dB dynamic range to characterize any Point-to-point networks from Access to short metro links</li> </ul>
METRO/CORE CWDM LONG-HAUL DWDM	<ul style="list-style-type: none"> <li>Dynamic range above 40 dB to test metro/core or long haul links</li> <li>High resolution at shortest pulse widths to account for many closely spaced splice points</li> <li>Specific ITU-grid CWDM wavelengths to test through add/drop or MUX/DEMUX</li> </ul>
ULTRA-LONG-HAUL SUBMARINE CABLES	<ul style="list-style-type: none"> <li>Test reach up to 250 km</li> <li>Highest dynamic range possible (up to 50.5 dB) for deploying and maintaining long fiber spans typically seen in ultra-long-haul and very high-speed networks</li> </ul>

## ...AND THEN THERE'S THE iOLM

**iOLM (Intelligent Optical Link Mapper)**

**OTDR challenges**

- WRONG OTDR TRACES
- COUNTLESS TRACES TO ANALYSE
- REPEATING THE SAME JOB TWICE
- COMPLEX TRAINING/SUPPORT

**A better way to test fiber optics**

**iOLM**  
Intelligent Optical Link Mapper  
iOLM is an OTDR-based application designed to simplify OTDR testing by eliminating the need to analyze and interpret multiple complex OTDR traces. Its advanced algorithms dynamically define the testing parameters, as well as the number of acquisitions that best fit the network under test. By correlating multipulse widths on multiple wavelengths, iOLM locates and identifies faults with maximum resolution—all at the push of a single button.

**How it works?**

- Dynamic multipulse acquisition:** iOLM adjusts test parameters dynamically for ANY link under test—using a mix of short, medium and long pulses as needed.
- Intelligent trace analysis:** Based on the multiple acquisitions and with the help of advanced algorithms, iOLM is able to detect more events with maximum resolution.
- Combine all results in a single link view:** Results are visually displayed in an icon-based fiber-link view to quickly assess each event's pass/fail status per standard selected, eliminating any risk of misinterpretation.
- Comprehensive diagnosis:** Delivers an analysis of failed events and suggests solutions, guiding the technicians in fixing the fault quickly and successfully.

**Turning traditional OTDR testing into clear, automatized, first-time-right results for technicians at any skill level.**

Automatic splitter ratio recognition for FTTH/PON testing. Automatic macroband identification.

**Did You Know?**  
iOLM can generate an OTDR trace in universal Bellcore format (.sor) for use with any OTDR viewer.

**Test Configuration**  
Create and share with your peers as many test configurations as needed for every specific job or network type. Test configurations define the pass/fail criteria, and the network type (i.e., point-to-point or with PON splitters).

## iOLM Testing Methodologies

**Bidirectional Testing**  
Bidirectional averaging testing is used for accurate splice loss measurement and is recommended in any type of application with singlemode, point-to-point (P2P) fiber links.

**Traditional Bidirectional OTDR View**  
Single OTDR pulse with A to B and B to A directions

**Single iOLM Bidirectional View**  
Combining multipulses, multiwavelengths and multidirections

## Loopback Testing (iOLM)

**Loopback Testing**

- Loops two fibers together at one end to test both fibers at once
- Software application will distinguish between the fibers in the reporting
- Particularly efficient in short- to medium-range fiber deployments
- Allows to test both upstream and downstream links with a single port—ideal for FTTA or DAS applications.

**Key Benefits of Using Loopback Testing:**

- 50% less testing time
- Single-ended test: less test equipment is required
- Performing loopback testing with two technicians requires minimal expertise from the second technician
- Distinct results for each fiber tested in loop (both OTDR and iOLM)
- Intuitive link view (iOLM) or traditional graphical view (OTDR) to identify loop section easily





# OTDR/iOLM reference poster



**EXFO**

## EXFO HEADQUARTERS

400 avenue Godin, Québec (Québec) G1M 2K2 CANADA  
Tel: 1-418-683-0211 Fax: 1-418-683-2170

Toll-free (USA and Canada) info@EXFO.com  
**1-800-663-3936** **EXFO.com**

© 2018 EXFO Inc. All rights reserved. Printed in Canada 18.09 2018031V2 5487074189

**EXFO**