

# Oldcastle BuildingEnvelope®

1-866-Oldcastle (653-2278) - [www.obe.com](http://www.obe.com)

## RELIANCE™-LT CURTAIN WALL 2" X 6-1/4" / POLYAMIDE PRESSURE PLATE / 1" GLAZING





Elev-Reliance-LT-625-PolyPP

H0042-Steel-Anchor  
H5021-ShrBlk-Anchors  
H5025-F-T-Mull-Anchors  
H5030-Steel-Reinf  
H5043-Mullion-Splice  
H5051-Head-at-Vision  
H5054-Sill-at-Vision  
H5055-Horiz-at-Vision  
H5058-Roll-Over-Horiz-at-Vision  
H5059-Roll-Under-Horiz-at-Vision  
H5068-Pocket-Frame-OpWin  
H5069-Flat-Frame-OpWin  
H5094-Expansion-Horizontal  
H5096-Spandrel-Options  
H5098-Vision-Options

V5029-SSG-Vertical-Opwin  
V5051-Jamb-Vertical-at-Vision  
V5052-Vertical-Mullion-at-Vision  
V5053-SSG-Vertical-Mullion  
V5054-SSG-Vertical-w-Cap  
V5055-Heavy-Mullion-at-Vision  
V5058-Vertical-OpWin  
V5065-90-Outside-Corner-at-Vision-2mull  
V5066-90-Inside-Corner-at-Vision-2mull  
V5067-SSG-90-Outside-Corner-at-Vision  
V5068-SSG-90-Inside-Corner-at-Vision  
V5069-SSG-135-Outside-Corner-at-Vision


## Table of Contents

Note: For Door Models visit :  
<http://www.obe.com/entrances>

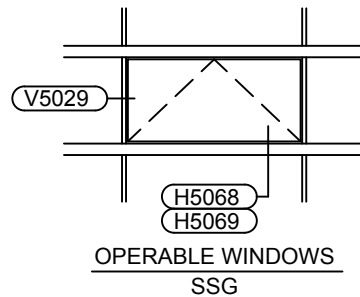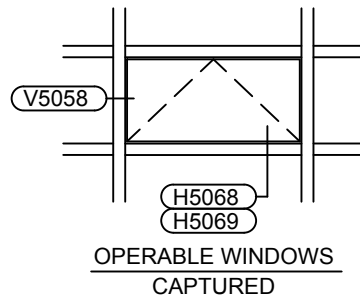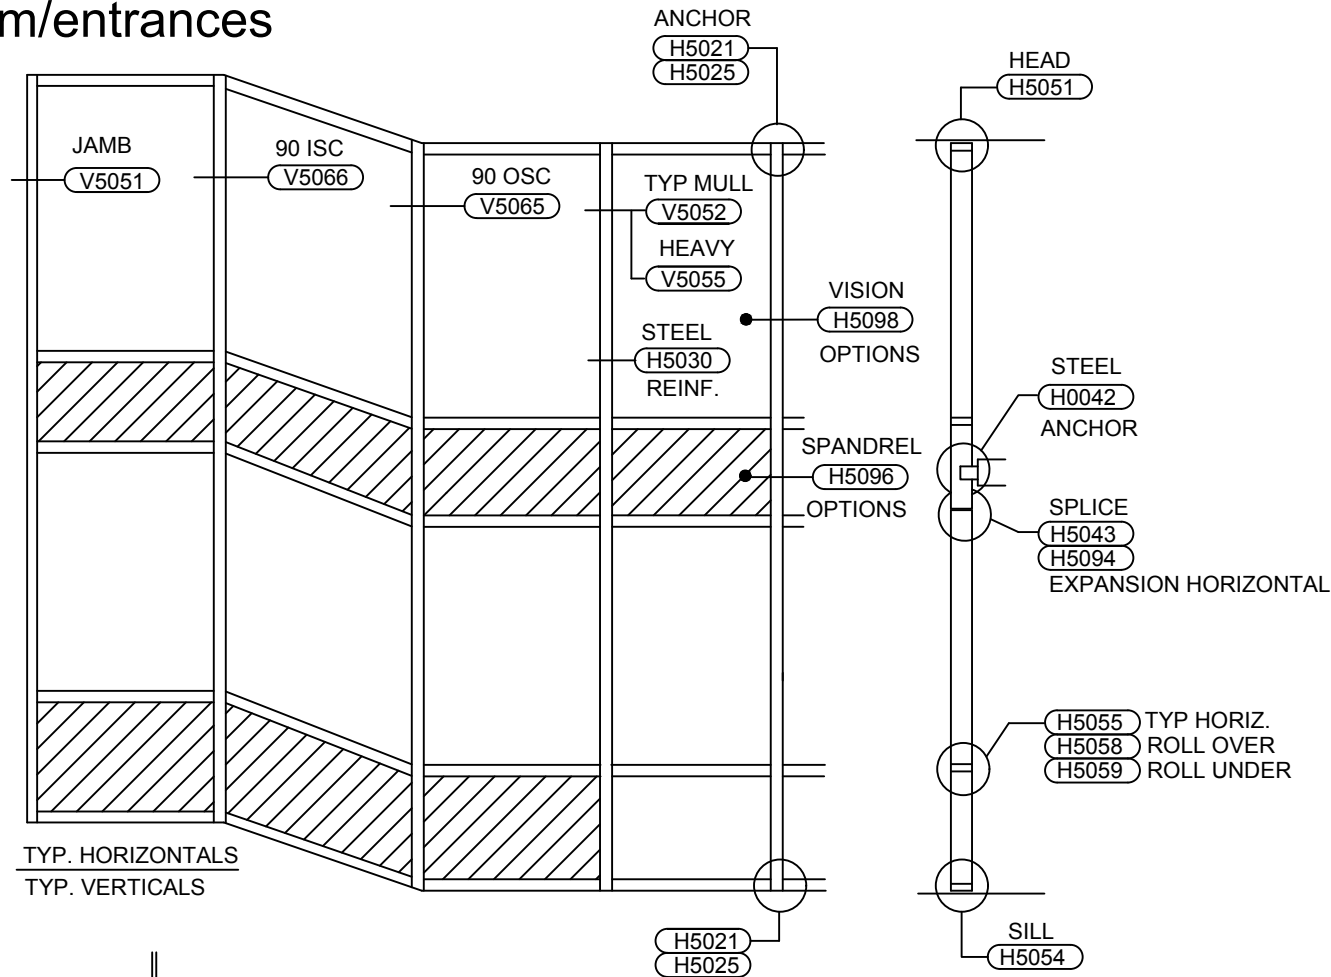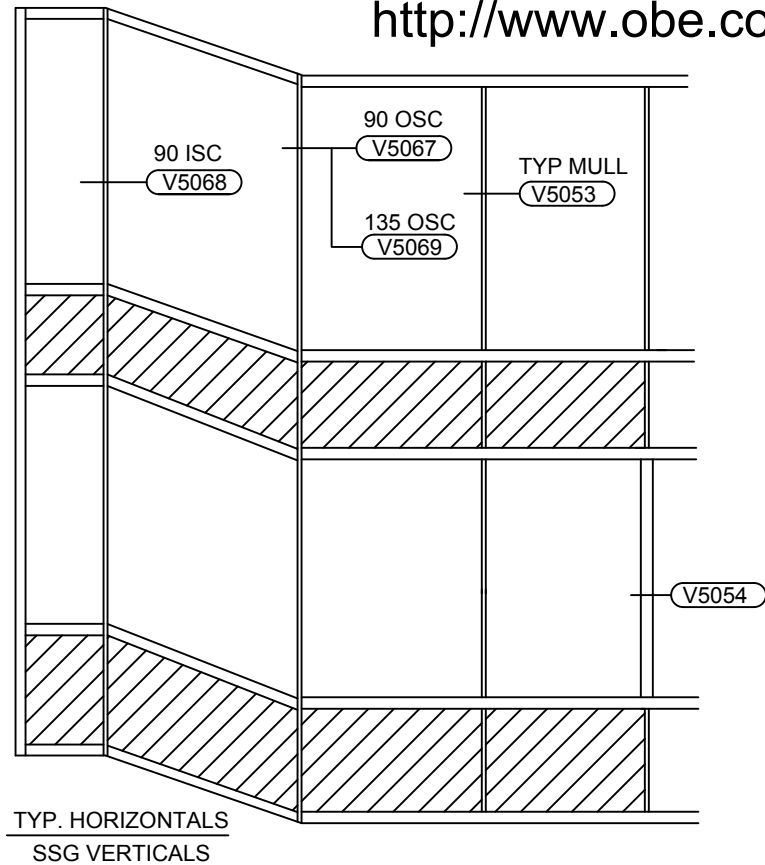


## MODEL: Elev-RLT-200x625

RELIANCE-LT CURTAIN WALL 2" X 6-1/4" -  
 POLYAMIDE PRESSURE PLATE - 1" GLASS

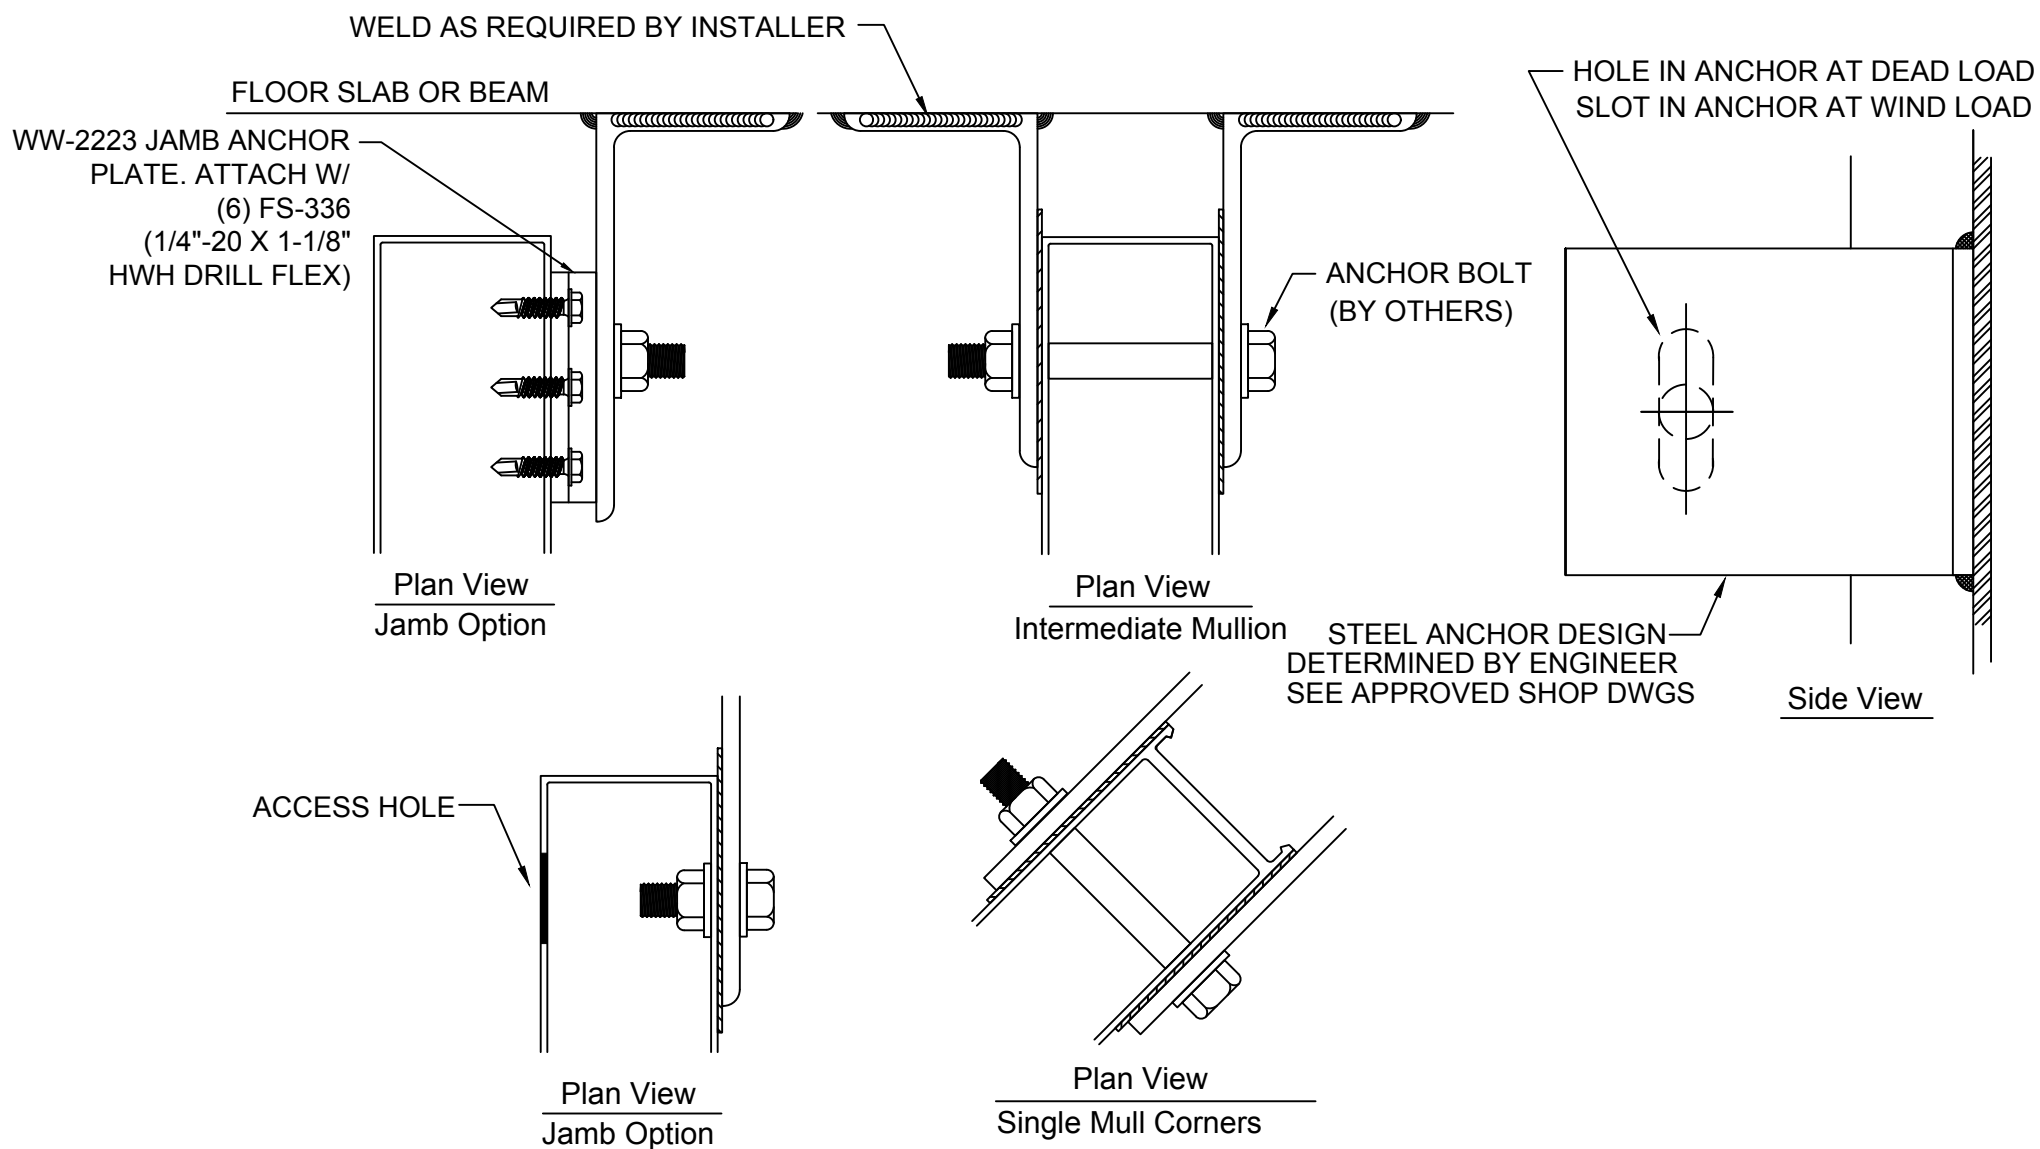


## Standard Curtain Wall Steel Anchor - H0042

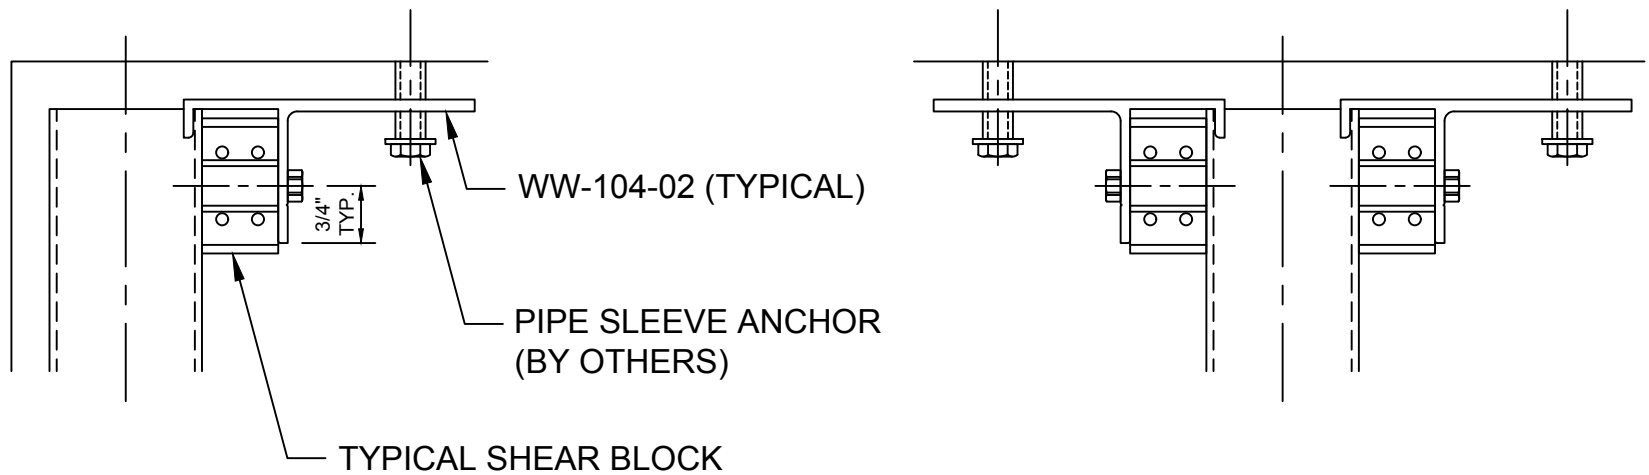


**NOTE:**

1. ANCHOR BOLT DESIGN DETERMINED BY STRUCTURAL ENGINEER
2. WW-104-02 ALUM. ANCHOR MAXIMUM END REACTION IS 375 LBS. FOR SINGLE ANCHOR (I.E., AT JAMBS) OR 750 LBS. AT INTERMEDIATE VERTICALS WITH 2 ANCHORS, ONE ON EACH SIDE OF MULLION.

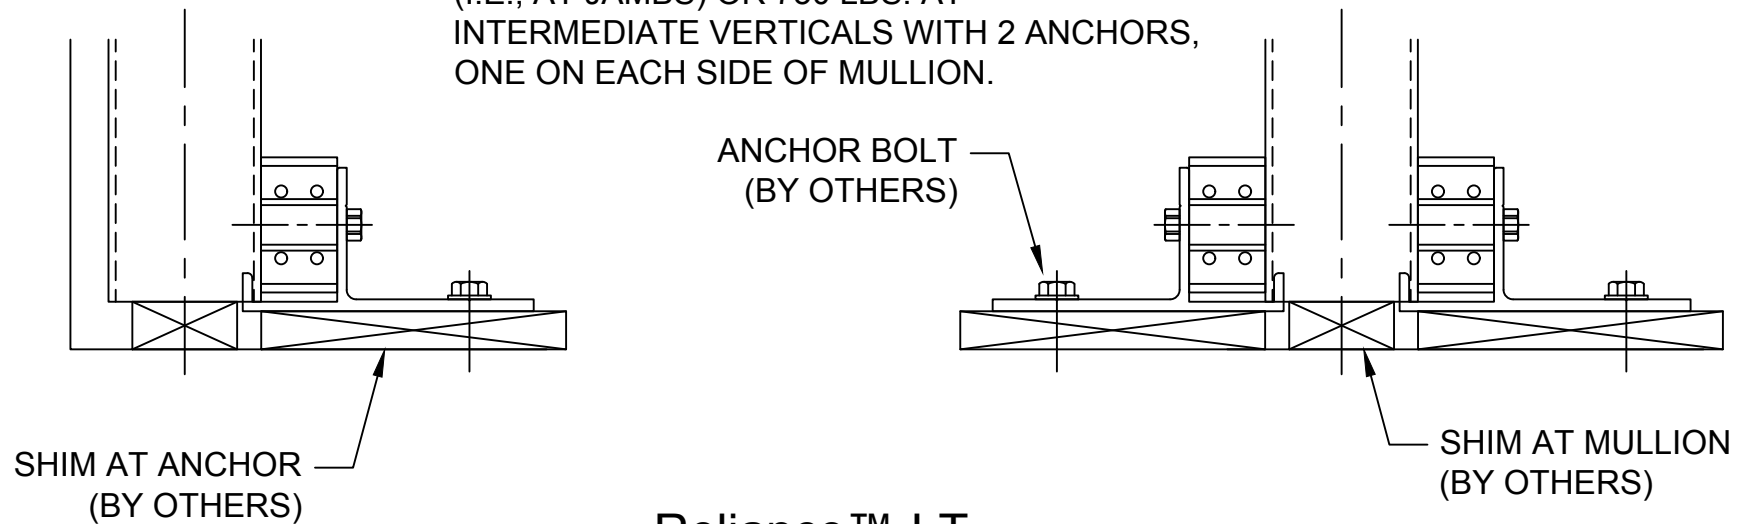

**Reliance™-LT**  
**Shear Block Anchors - H5021**

## ALL STANDARD RELIANCE-LT JAMBS / MULLS

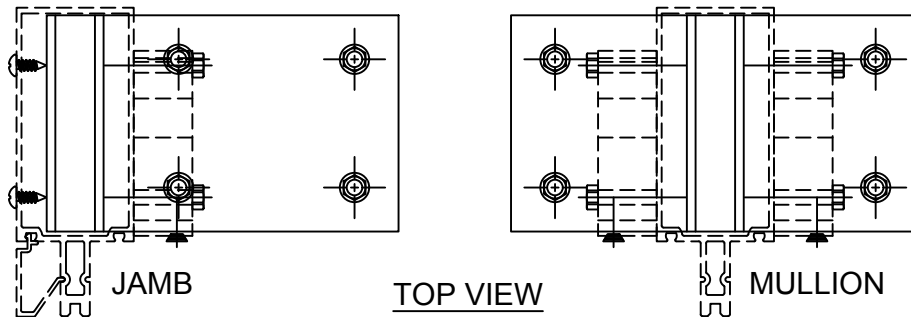


## "T" ANCHOR CHART

PART NO.	MULLION
RL-102-01	RL-400
RL-102-02	RL-500
RL-102-03	RL-404 - RL-410
RL-102-04	RL-504 - RL510

## "F" ANCHOR CHART

PART NO.	MULLION
RL-103-01	RL-400
RL-103-02	RL-500
RL-103-03	RL-404 - RL-410
RL-103-04	RL-504 - RL-510

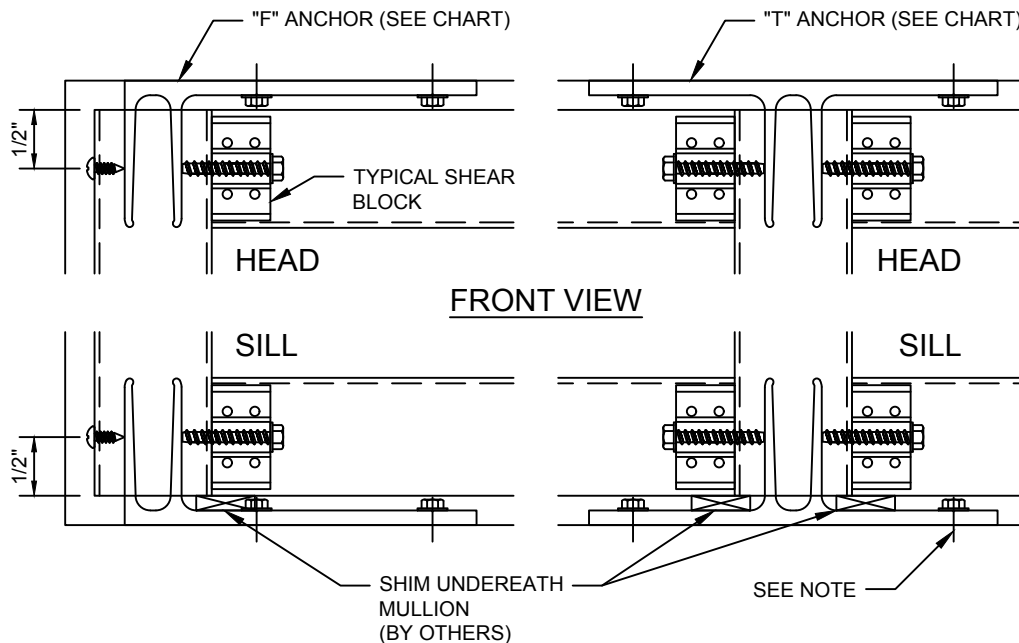


### NOTES:

1. ANCHOR BOLT SIZE, QUANTITY AND LOCATION DETERMINED BY STRUCTURAL ENGINEER
2. SCALE = 1/2 SIZE

## Reliance™-LT "F" & "T" Mullion Anchors - H5025

See approved shop dwg's for specific requirements.

Ref. installation manual for additional info.

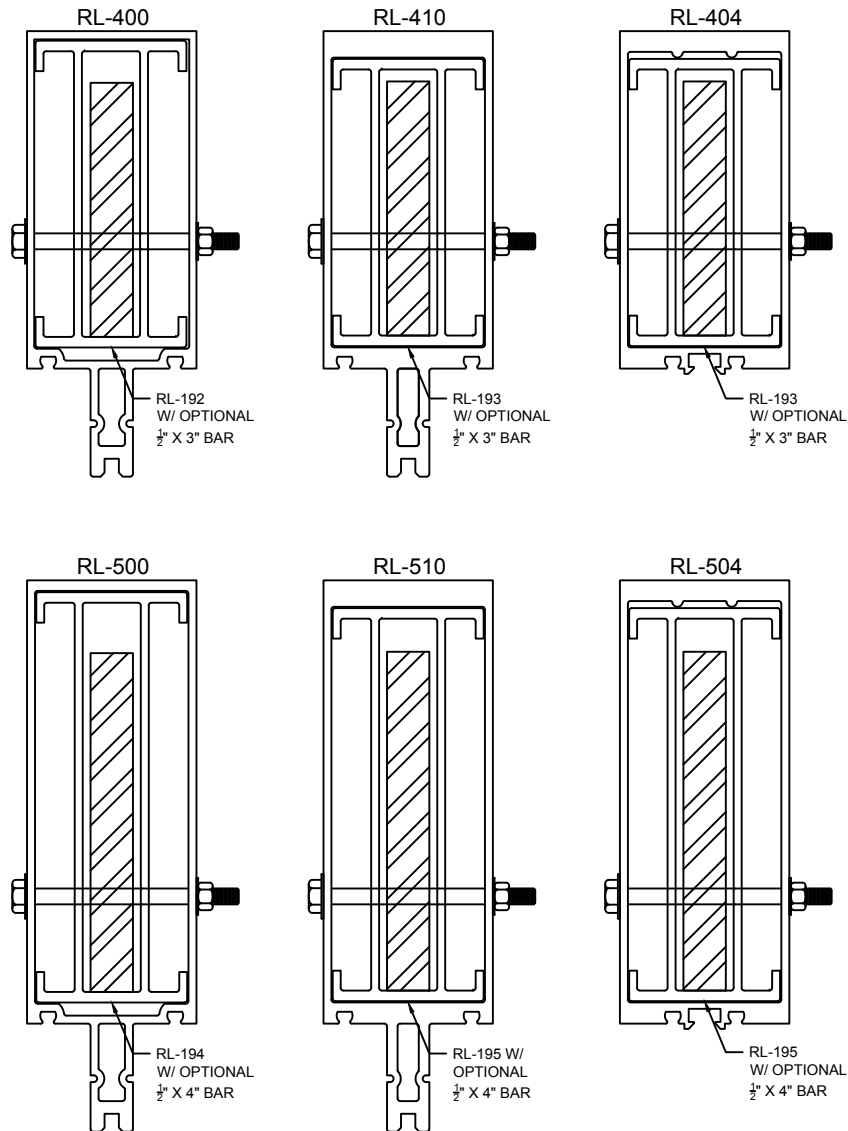


STEEL REINFORCING CHART


A	RL-192 Aluminum Reinforcement
B	RL-193 Aluminum Reinforcement
C	RL-194 Aluminum Reinforcement
D	RL-195 Aluminum Reinforcement
E	RL-192 w/ 1/2" x 3" Steel Bar
F	RL-193 w/ 1/2" x 3" Steel Bar
G	RL-194 w/ 1/2" x 4" Steel Bar
H	RL-195 w/ 1/2" x 4" Steel Bar

## Reliance™-LT Steel Reinforcement - H5030



RL-400/RL-500

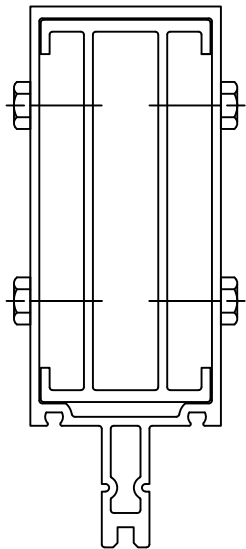


RL-410/RL-510

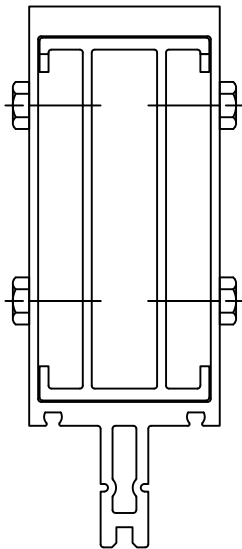


RL-404/RL-504

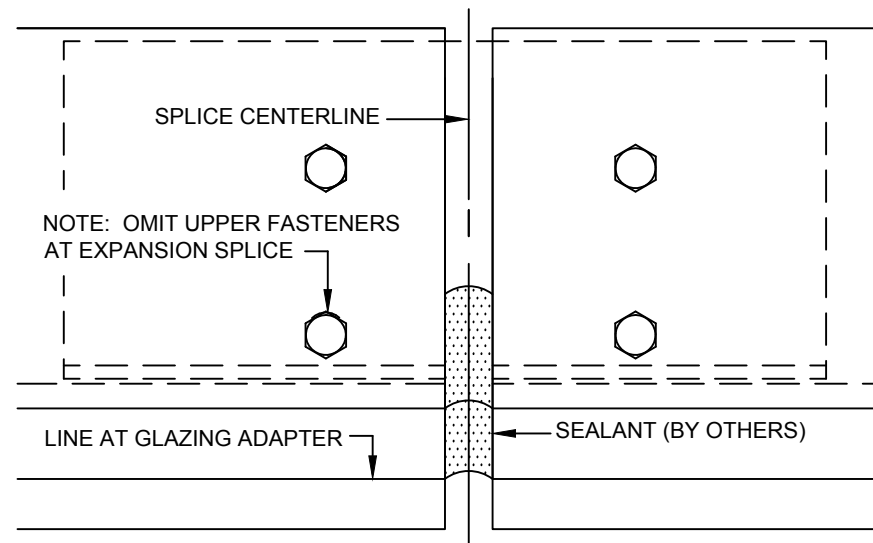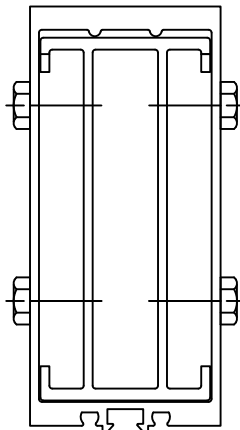


WW-240

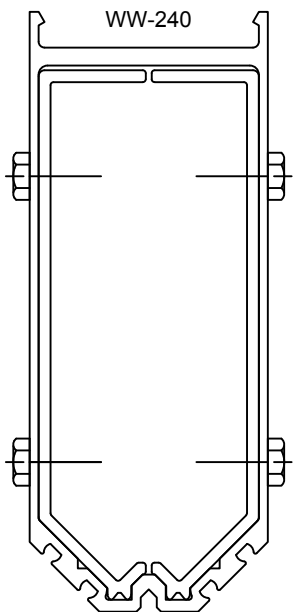

WW-230

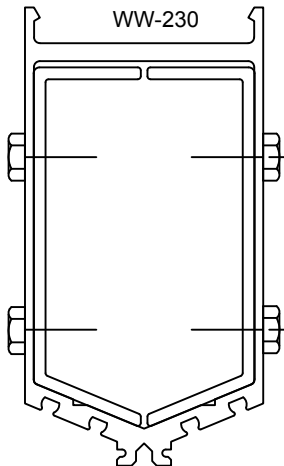

WW-241

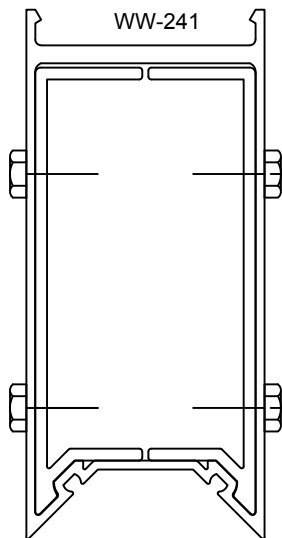

6" SYSTEM DEPTH


MULLION	SPLICE
RL-400	RL-192-01
RL-404	RL-193-01
RL-410	RL-193-01
WW-230	WW-190-01
WW-240	WW-191-01
WW-241	WW-202-01

7-1/4" SYSTEM DEPTH

MULLION	SPLICE
RL-500	RL-194-01
RL-504	RL-195-01
RL-510	RL-195-01
WW-230	WW-190-01
WW-240	WW-191-01
WW-241	WW-202-01


REFERENCE INSTALLATION MANUAL FOR ADDITIONAL SPLICE INFO.

## Reliance™-LT Mullion Splices - H5043

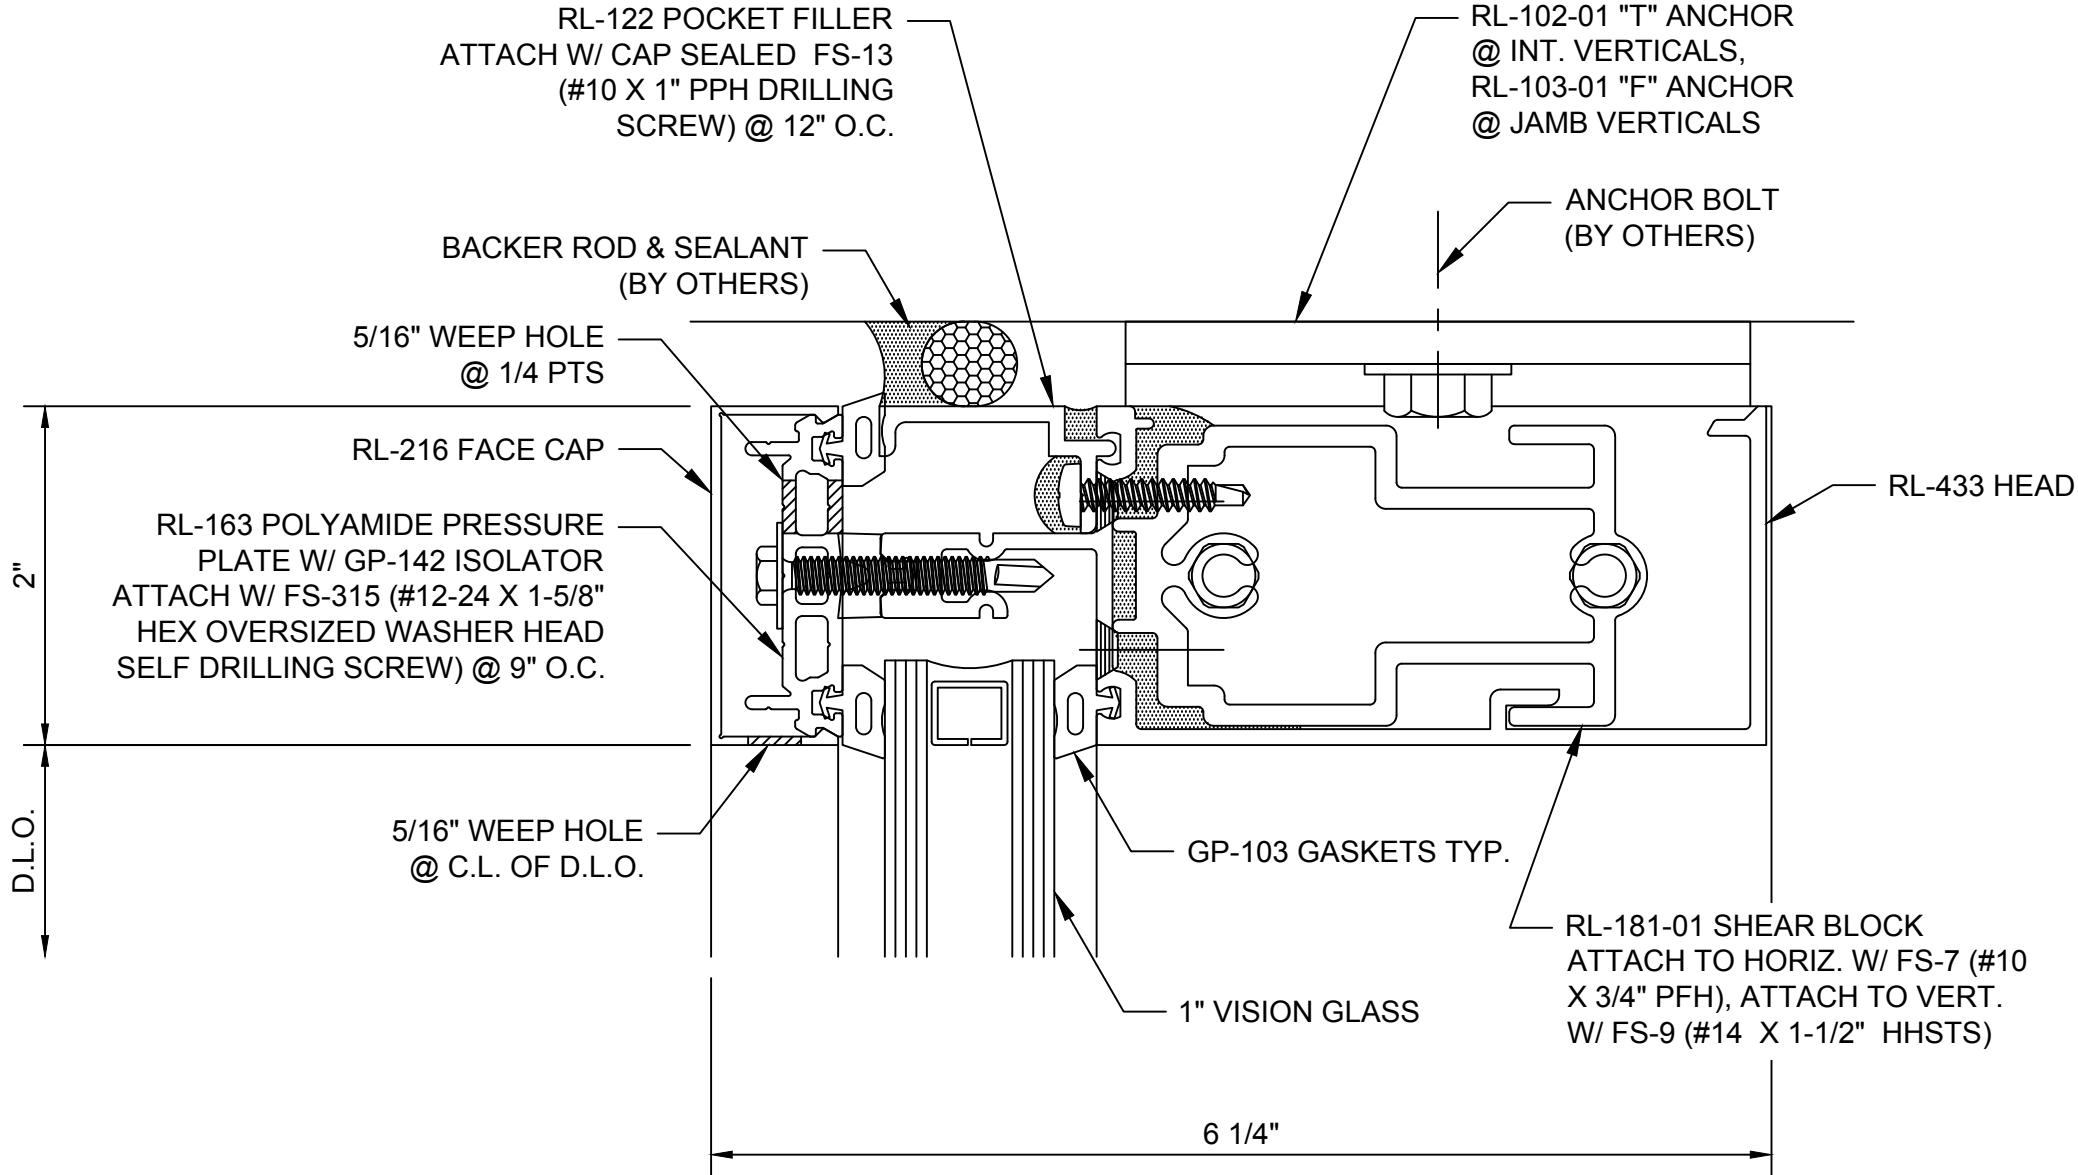


**Reliance™-LT**  
**Head at Vision - H5051**




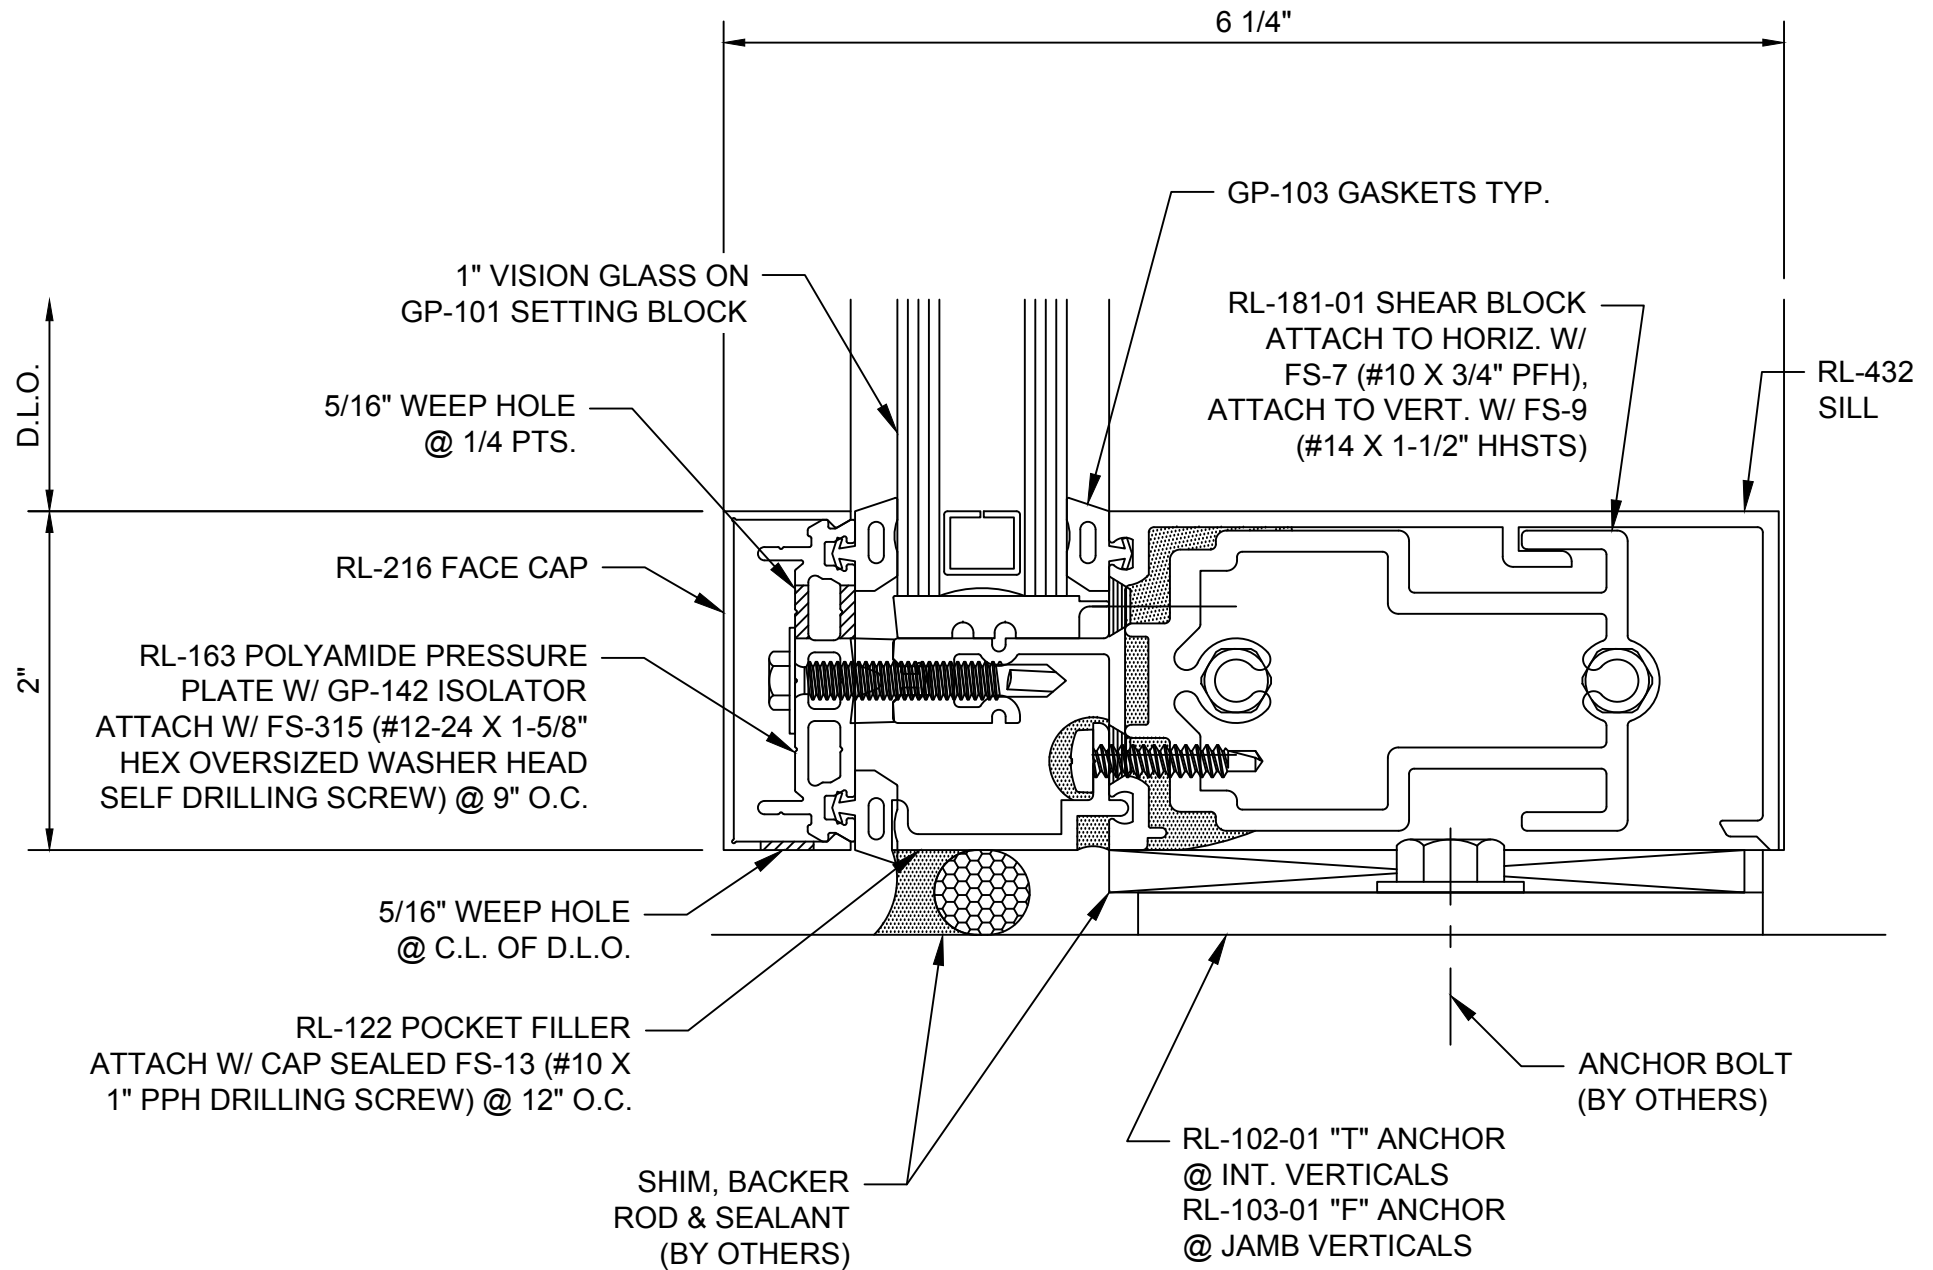


## Reliance™-LT Sill at Vision - H5054

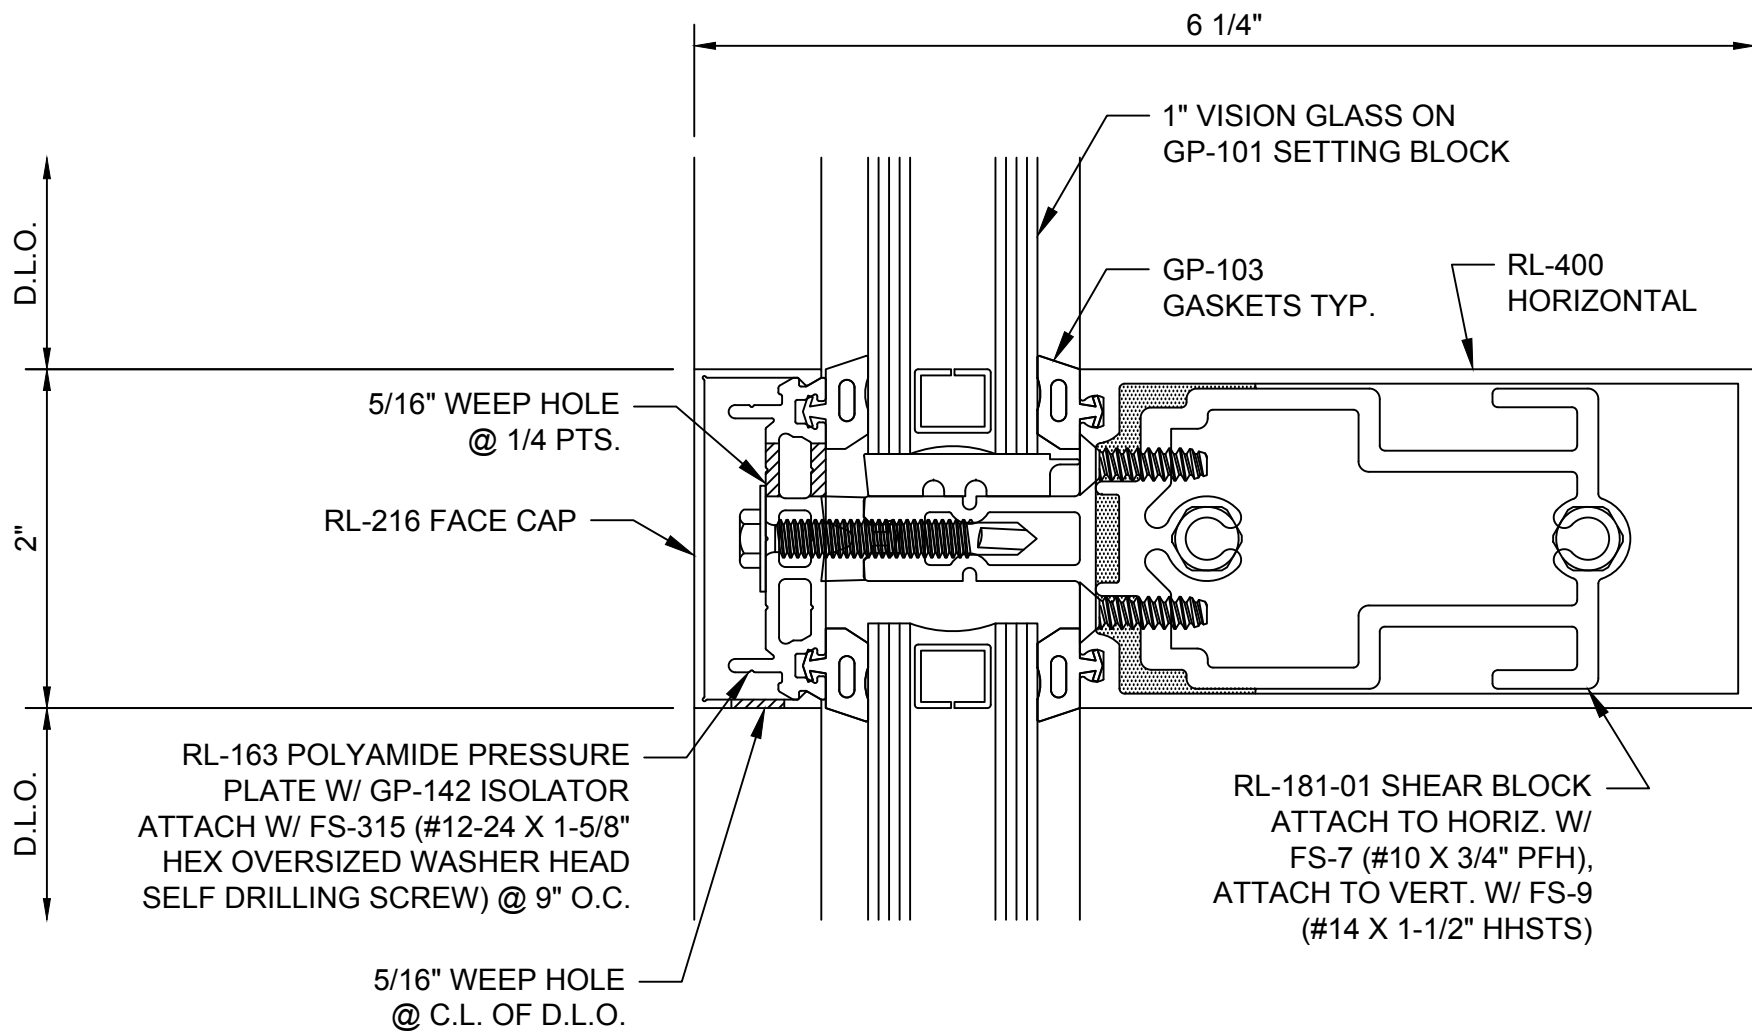


**Reliance™-LT**  
**Intermediate Horizontal at Vision - H5055**

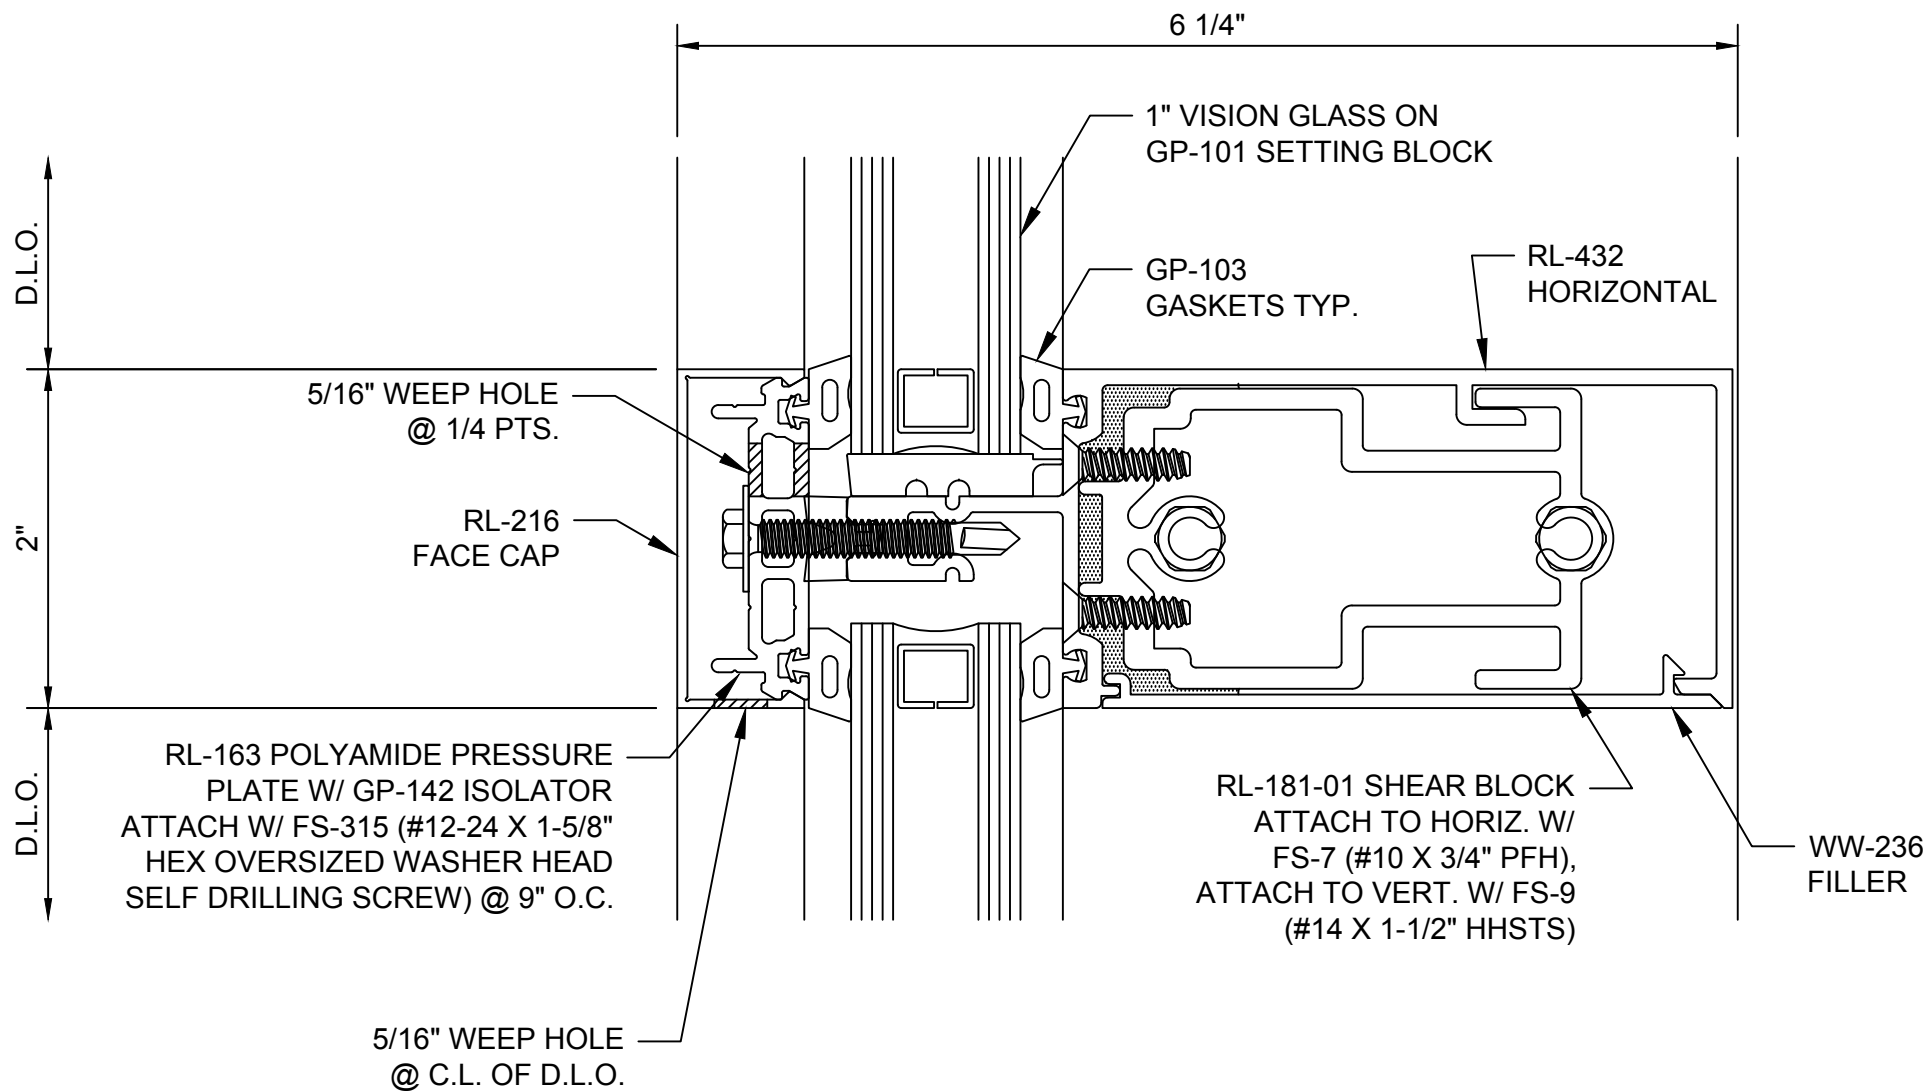


**Reliance™-LT**  
**Roll-over Horizontal at Vision - H5058**

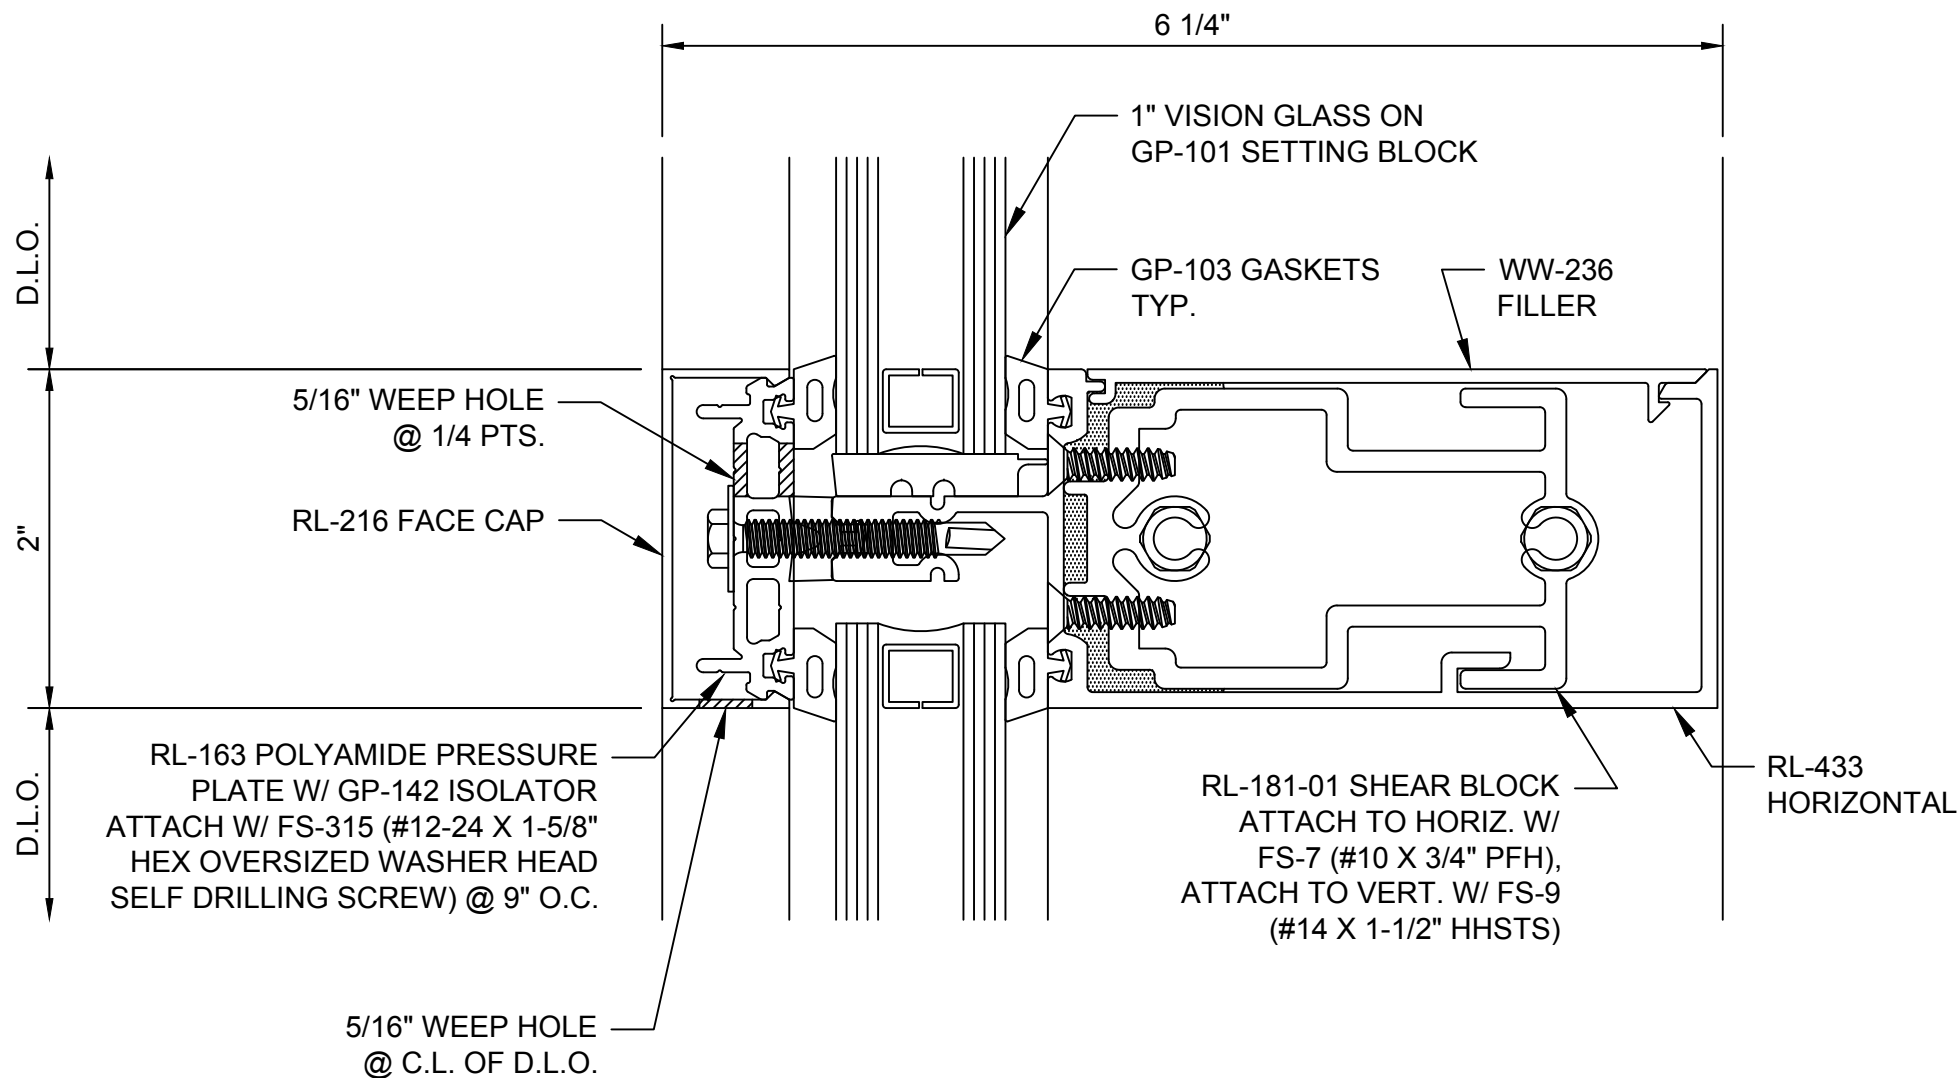


**Reliance™-LT**  
**Roll-under Horizontal at Vision - H5059**

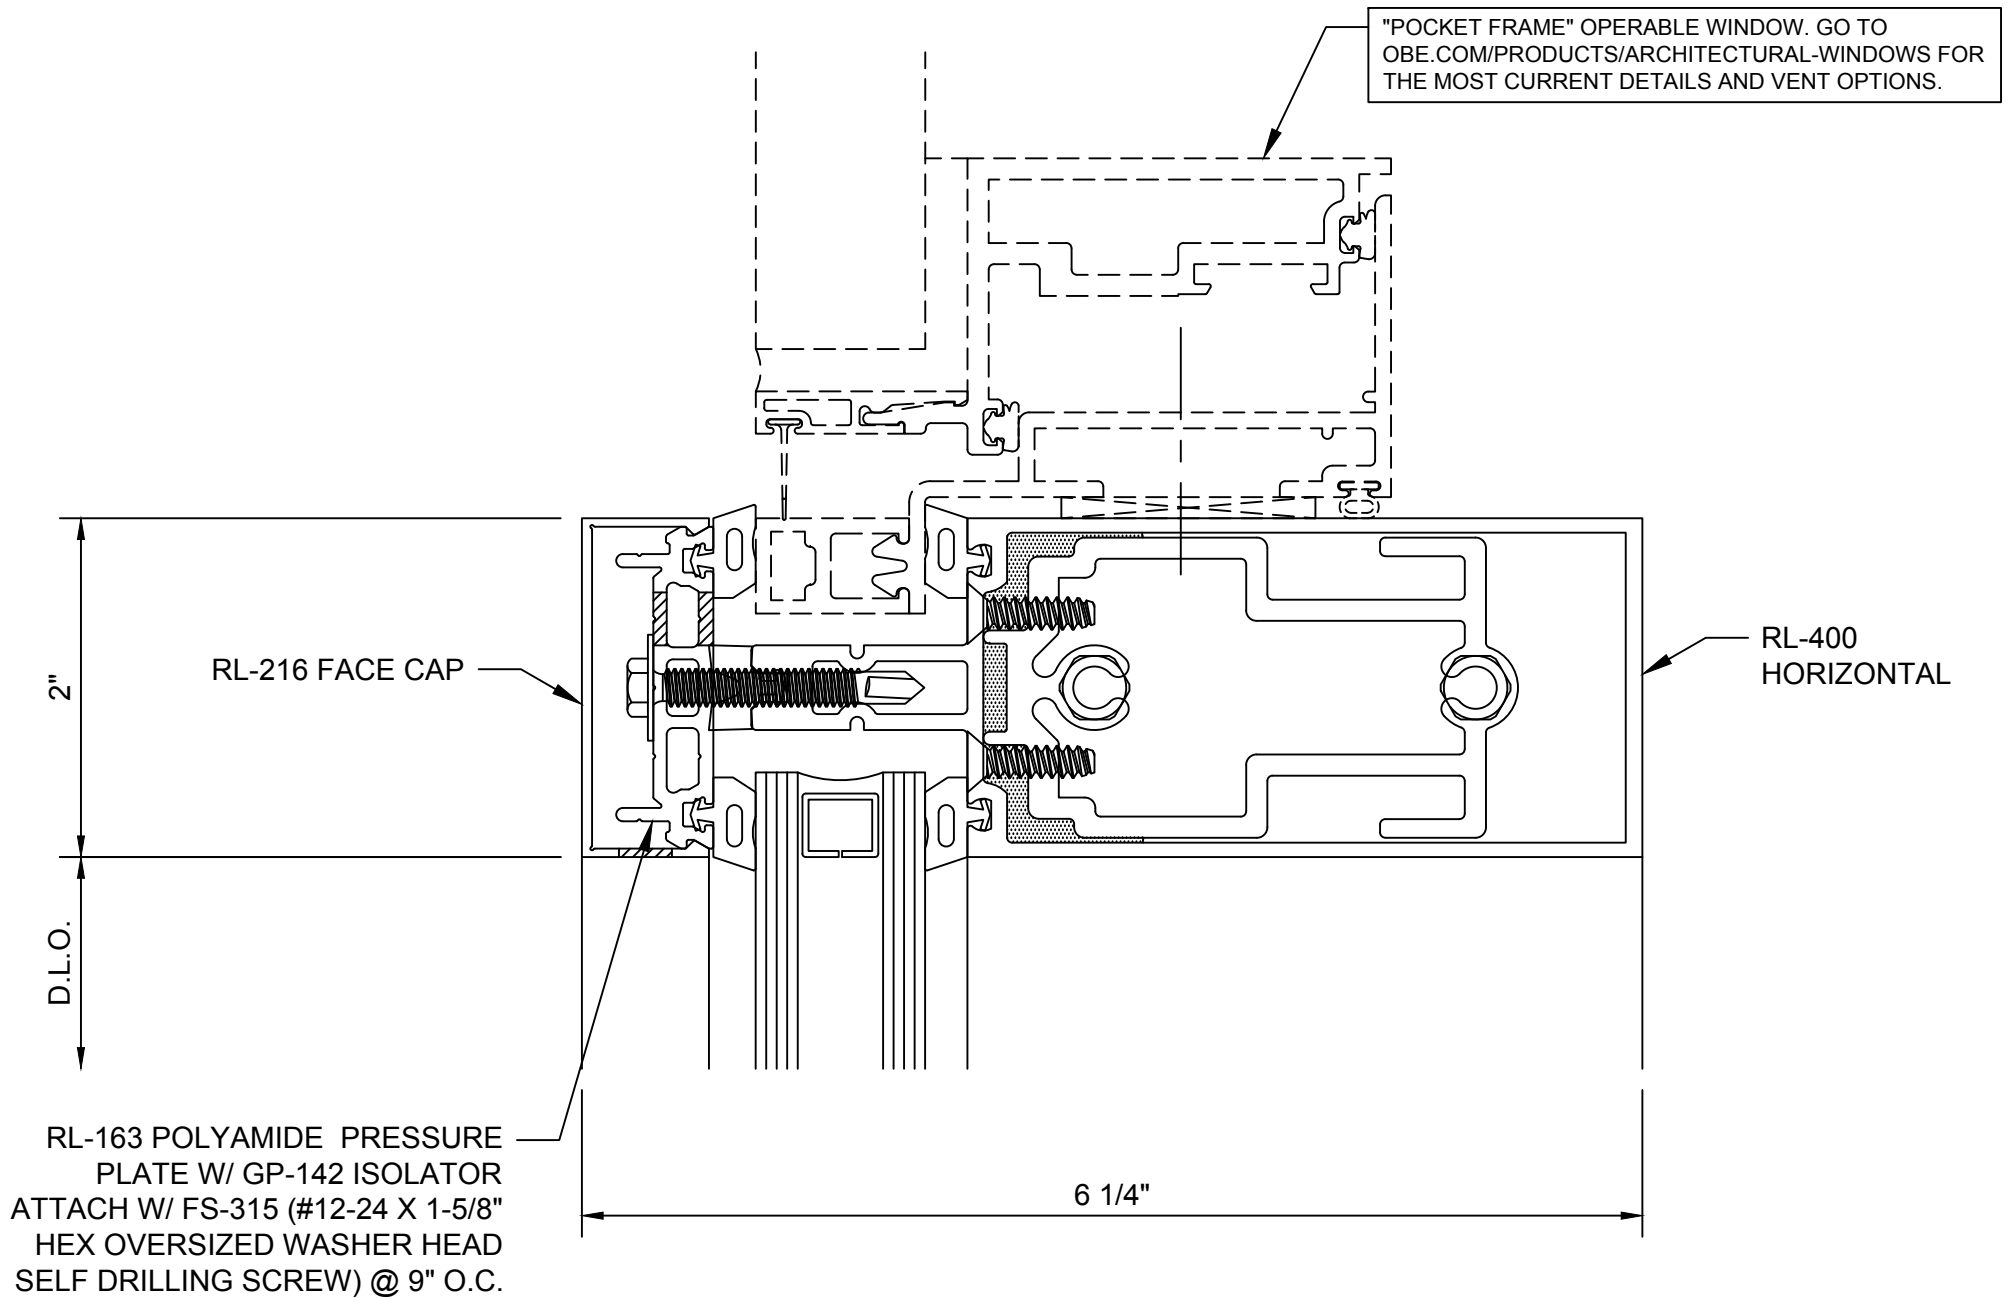

**Reliance™-LT**  
**Horizontal at Operable Window - H5068**

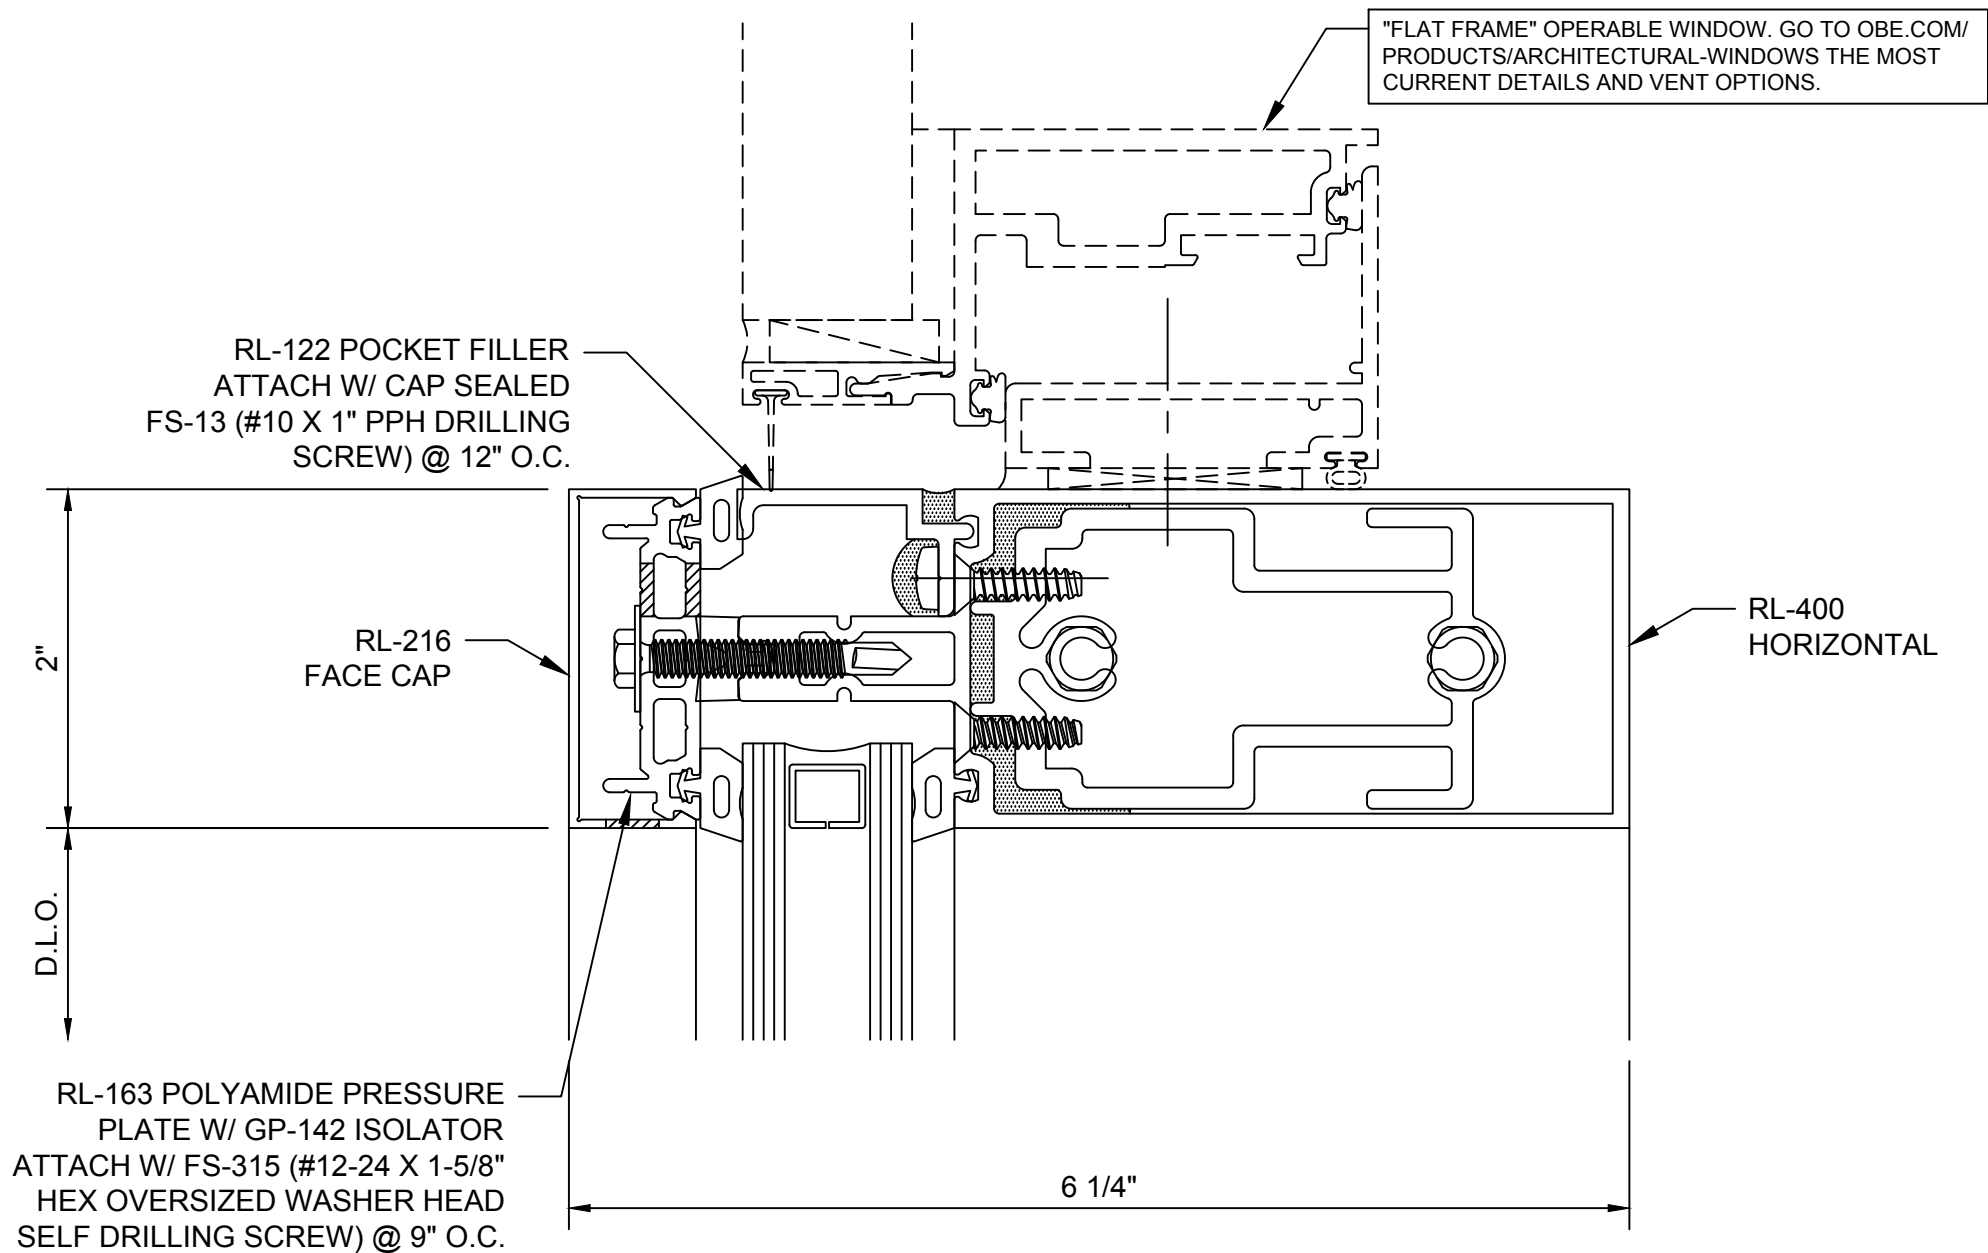


**Reliance™-LT**  
**Horizontal at Operable Window - H5069**




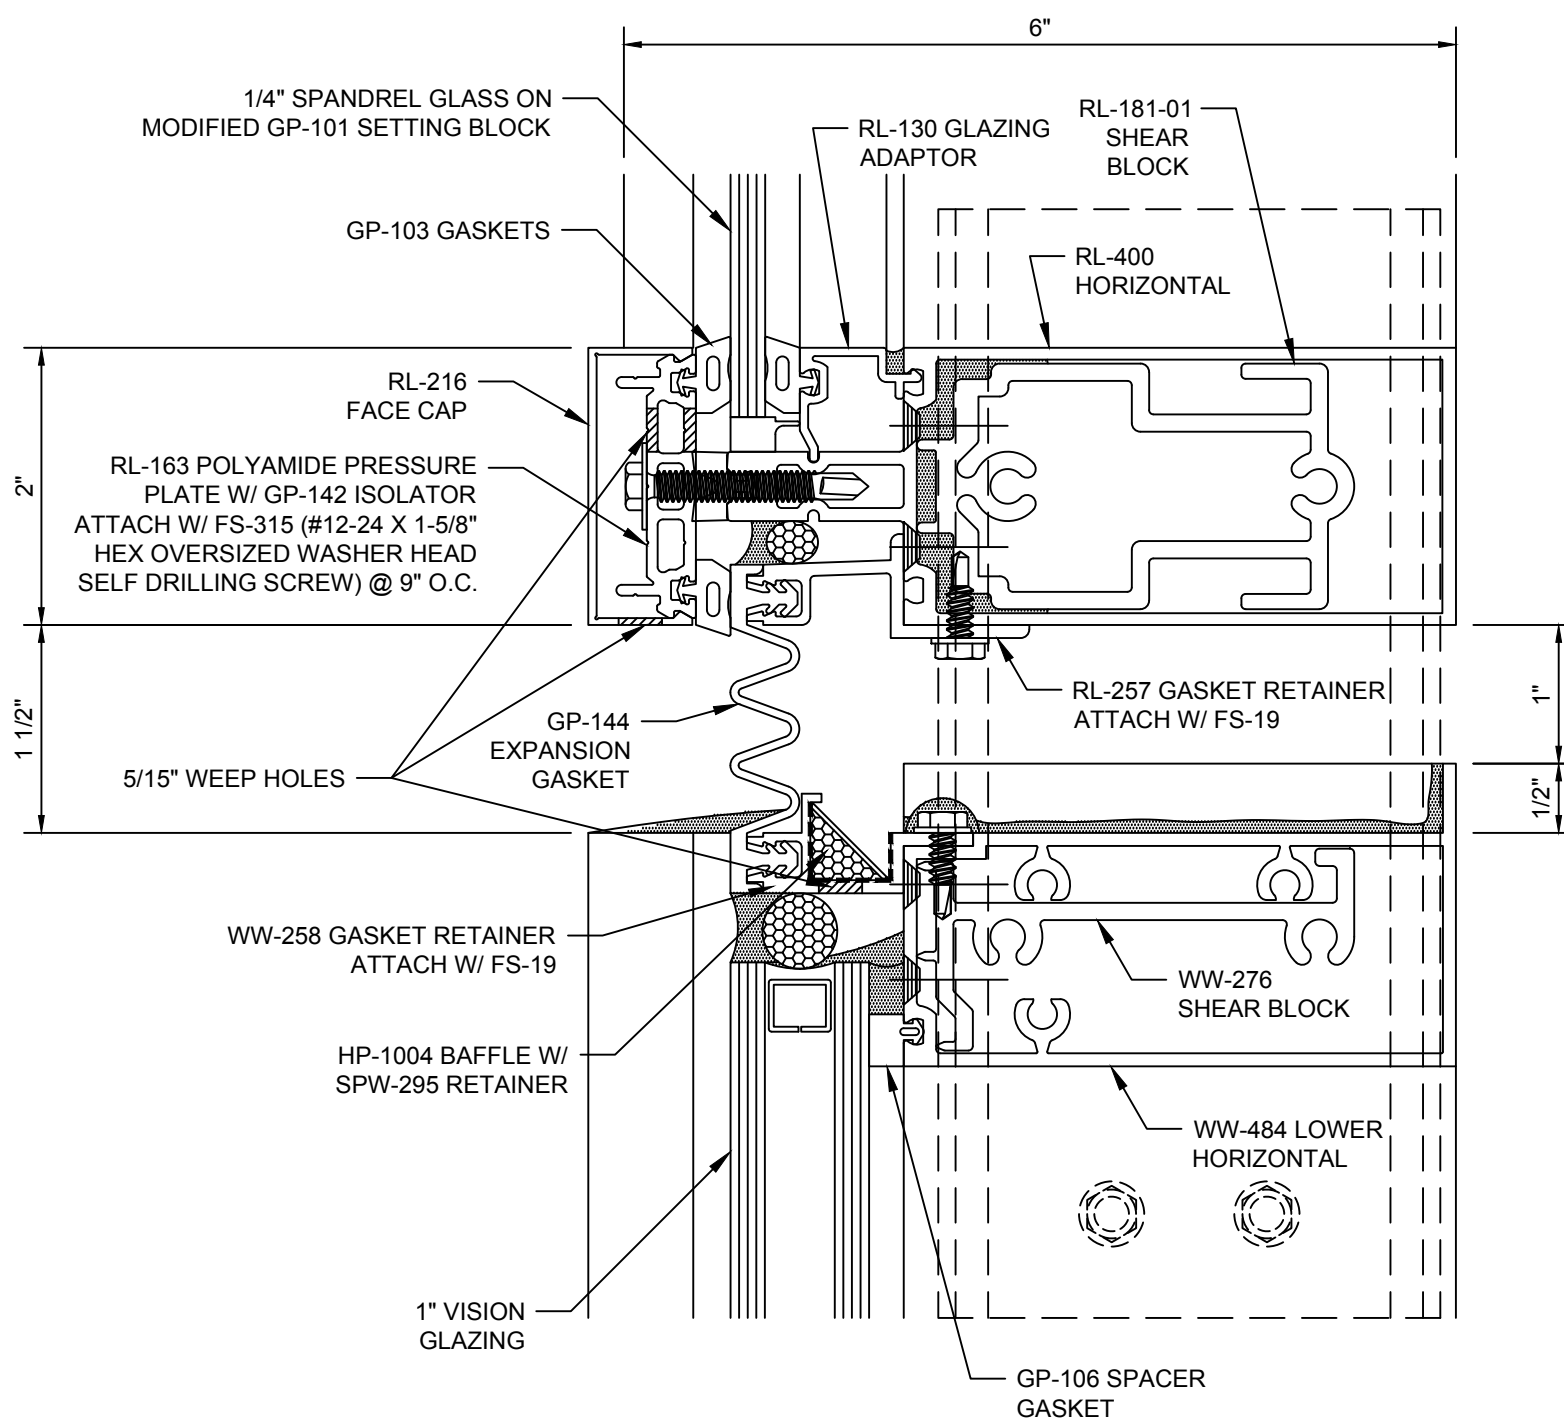


## Reliance™-LT

### Expansion Horizontal - H5094

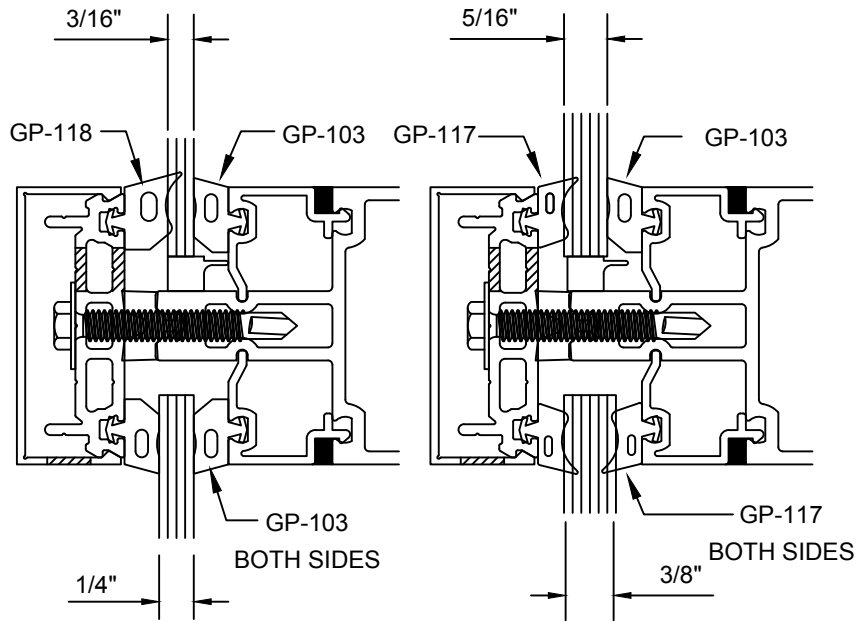

Glass Chart			
Glass	Gasket Exterior	Gasket Interior	Glazing Adapter
0.1875"	GP-118	GP-103	RL-130
0.250"	GP-103	GP-103	RL-130
0.3125"	GP-117	GP-103	RL-130
0.375"	GP-117	GP-117	RL-130

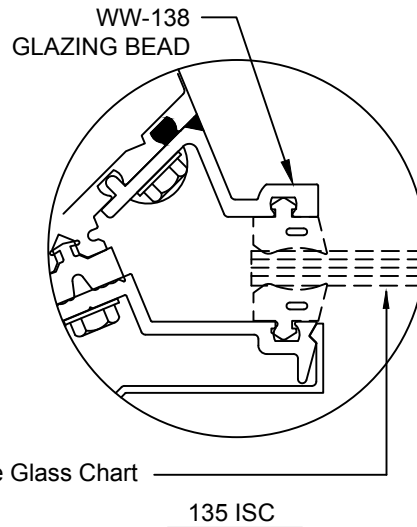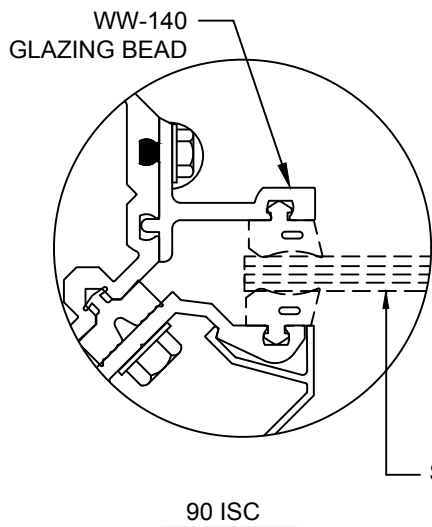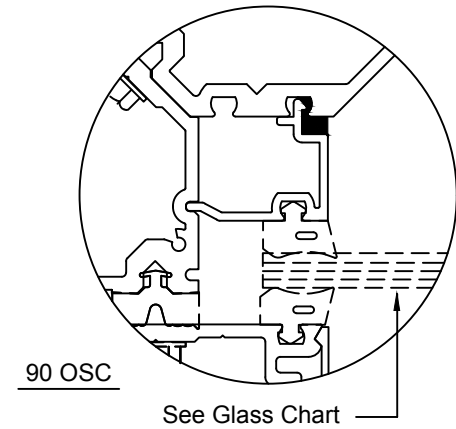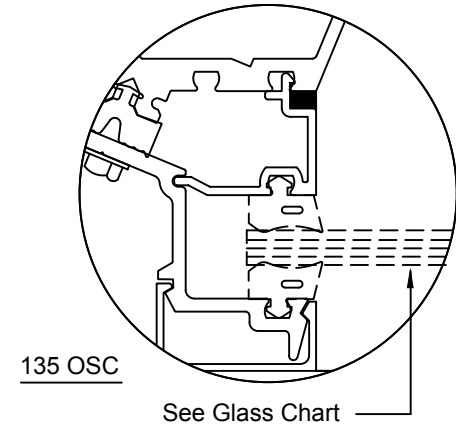


#### NOTE:

1. GP-101 (modified) Setting Block (Typical)
2. Glass Pocket with adapter = 3/4"
3. Adaptors/Glazing Beads set in Sealant (Sealant by Others)
4. Single mullion corners available with aluminum pressure plate only.


## Reliance™-LT Glazing Adaptors and Spandrel Glass Options - H5096



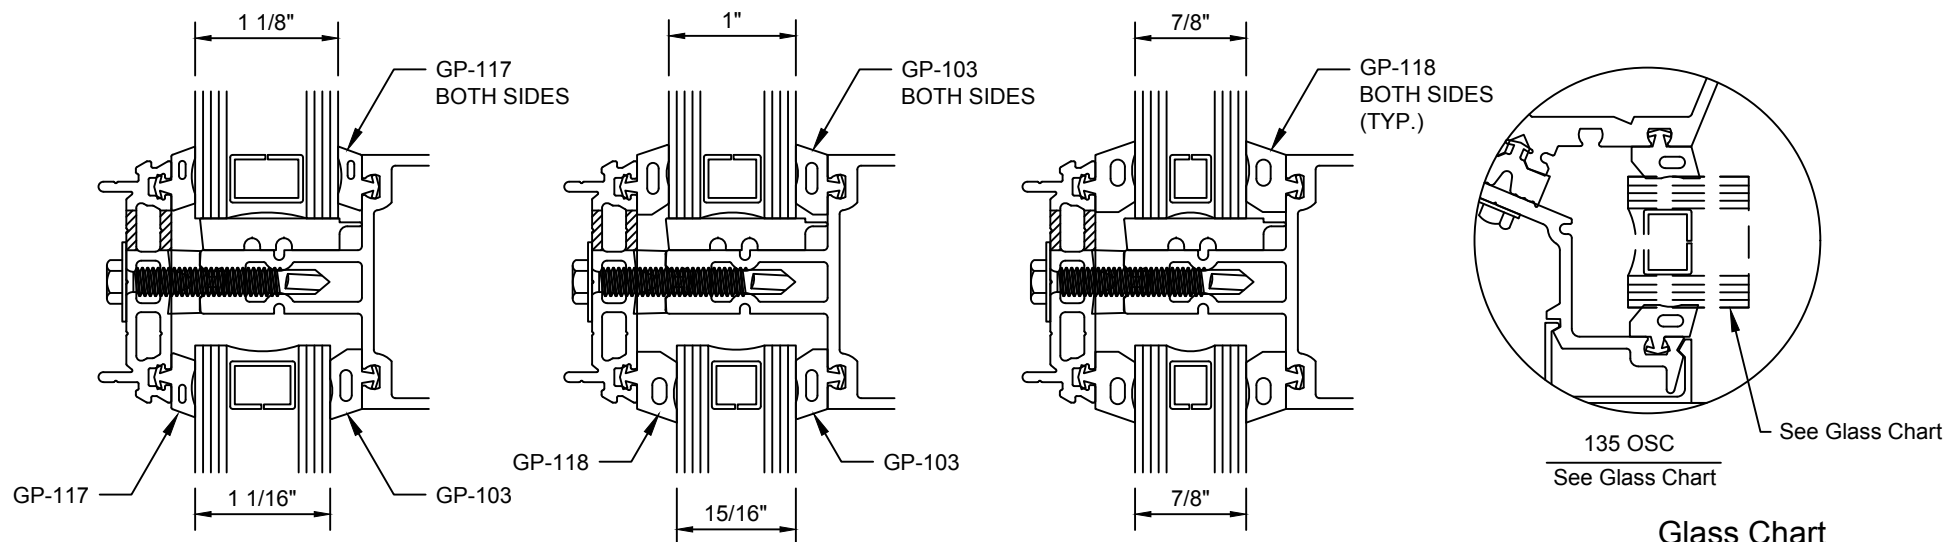

Glass Chart

Glass Size	Gasket Exterior	Gasket Interior
0.875"	GP-118	GP-118
0.9375"	GP-118	GP-103
1.00"	GP-103	GP-103
1.0625"	GP-117	GP-103
1.125"	GP-117	GP-117

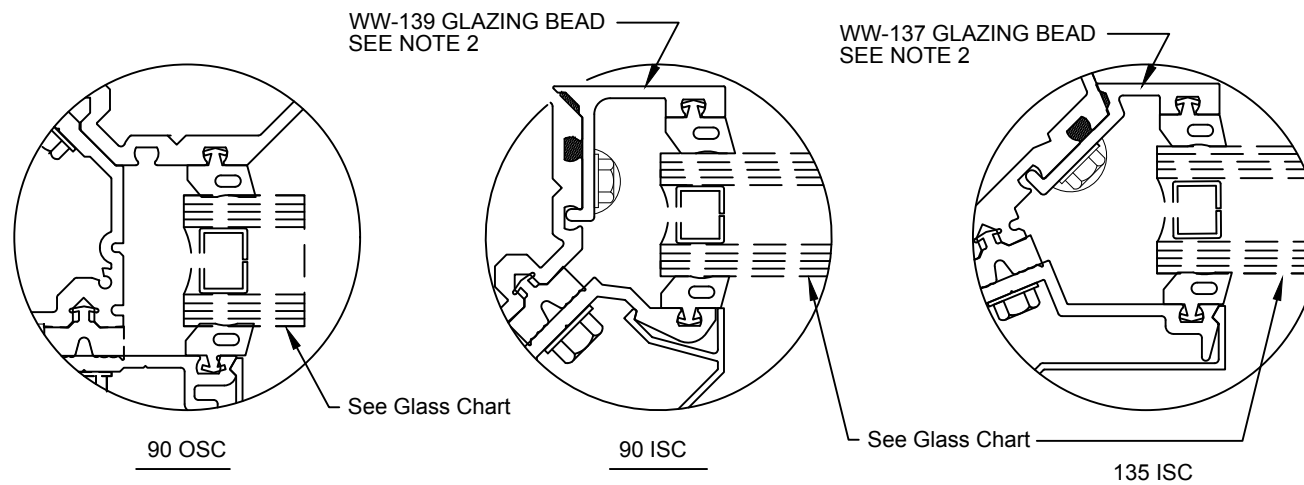


NOTE:

1. Glass Pocket = 1-1/2" (Typical)
2. Glazing beads set in sealant (Sealant by others)


135° SINGLE MULL CORNERS NOT AVAILABLE AT 10" SYSTEMS

## Reliance™-LT


### Glazing Adaptors and Vision Glass Options - H5098

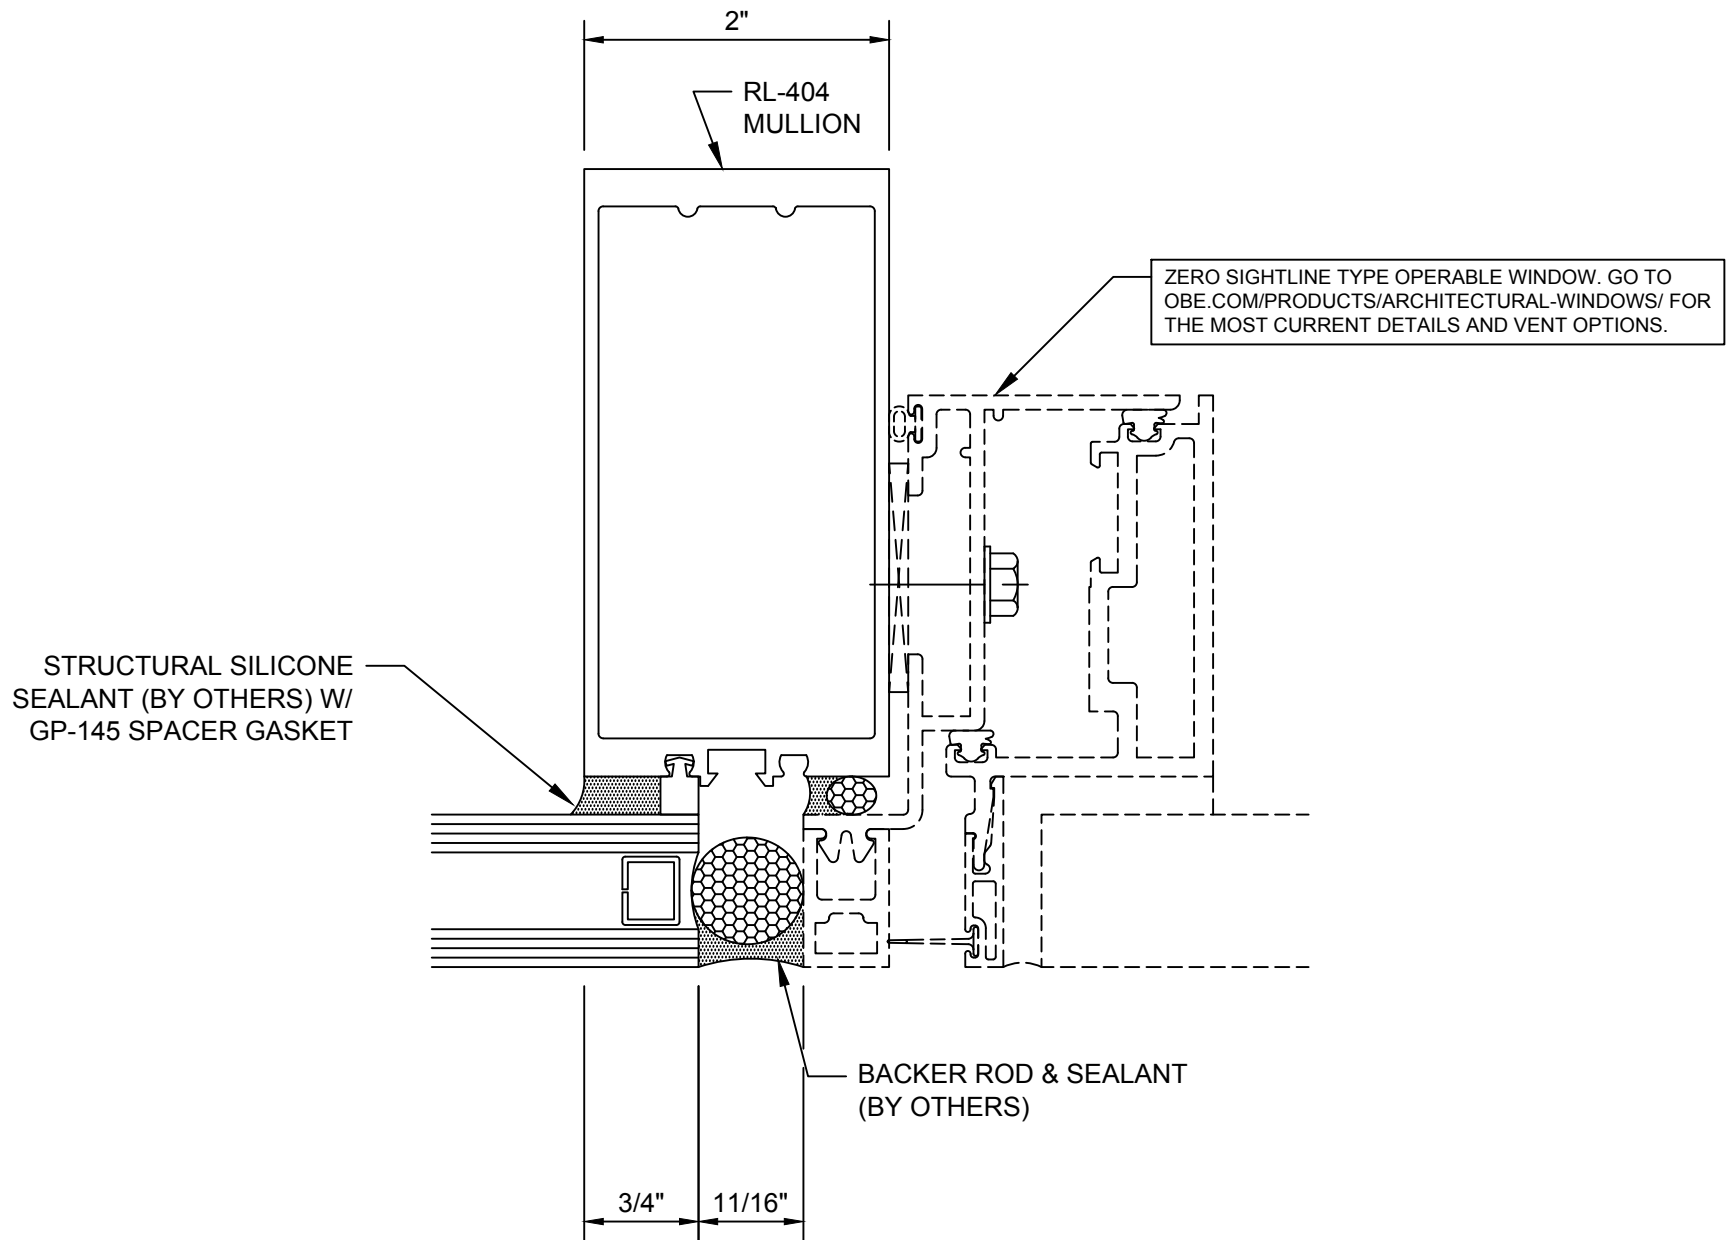


**Reliance™-LT**  
**SSG Vertical Mullion at Operable Window - V5029**

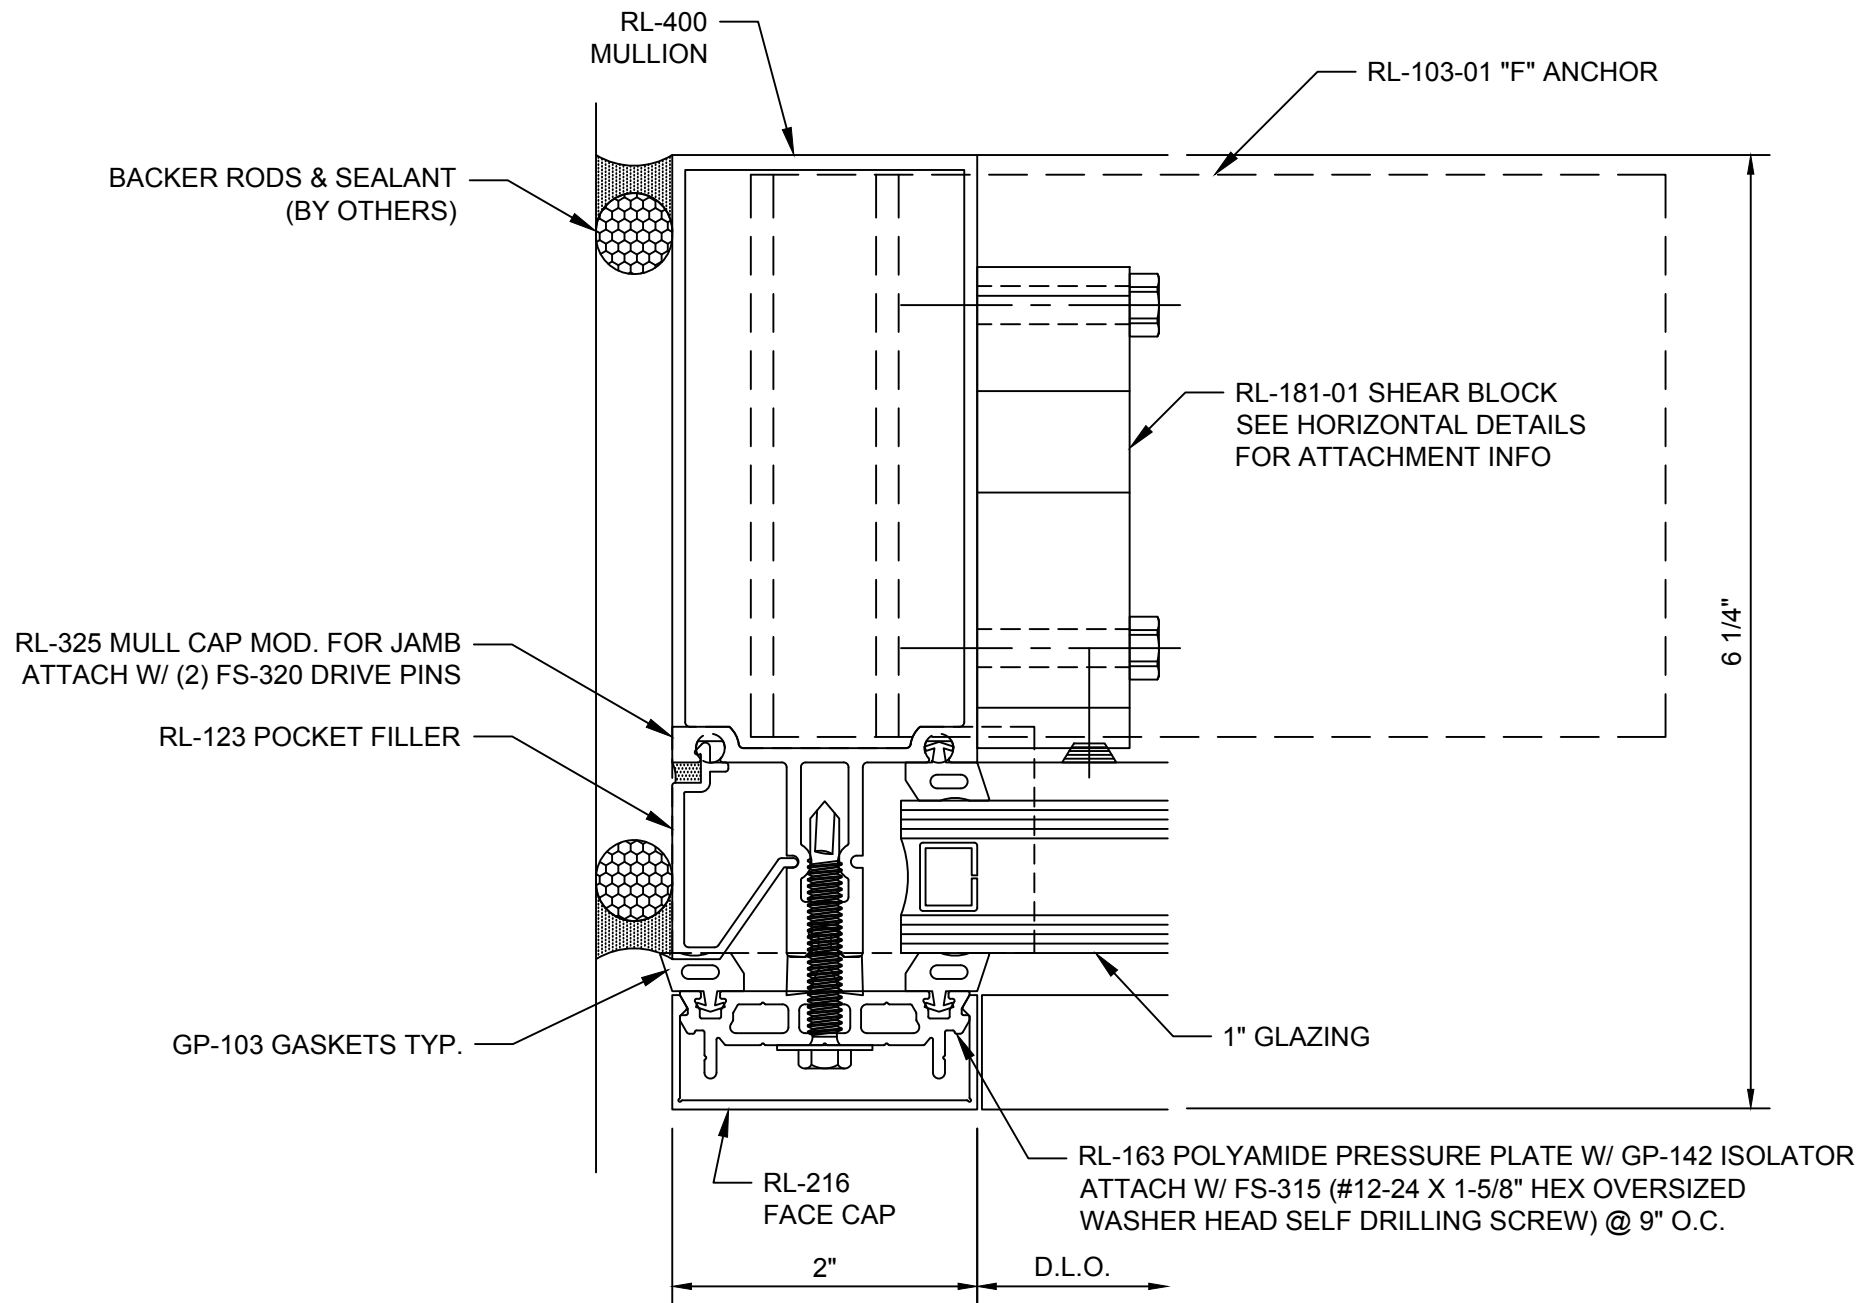

**Reliance™-LT**  
**Jamb Vertical - V5051**

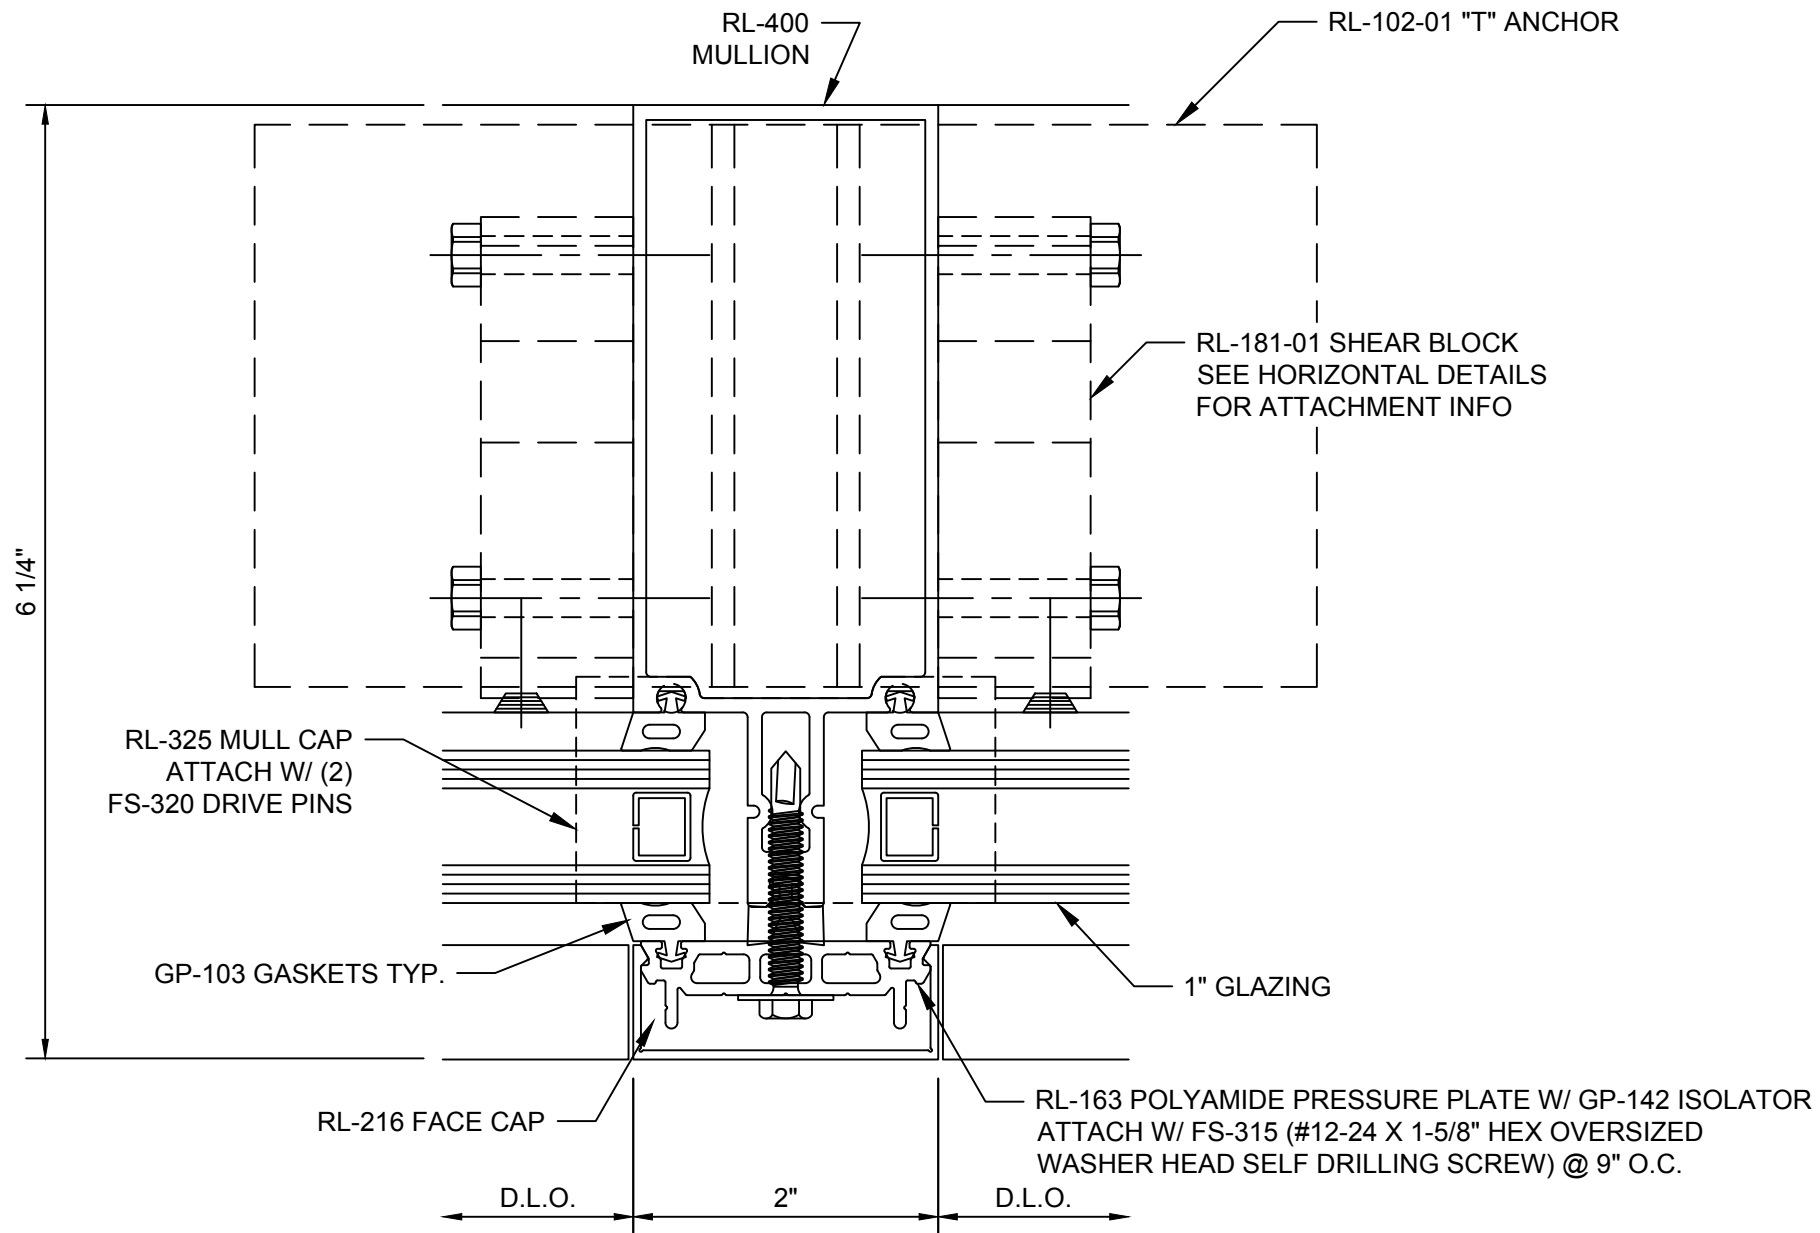


**Reliance™-LT**  
**Vertical Mullion - V5052**

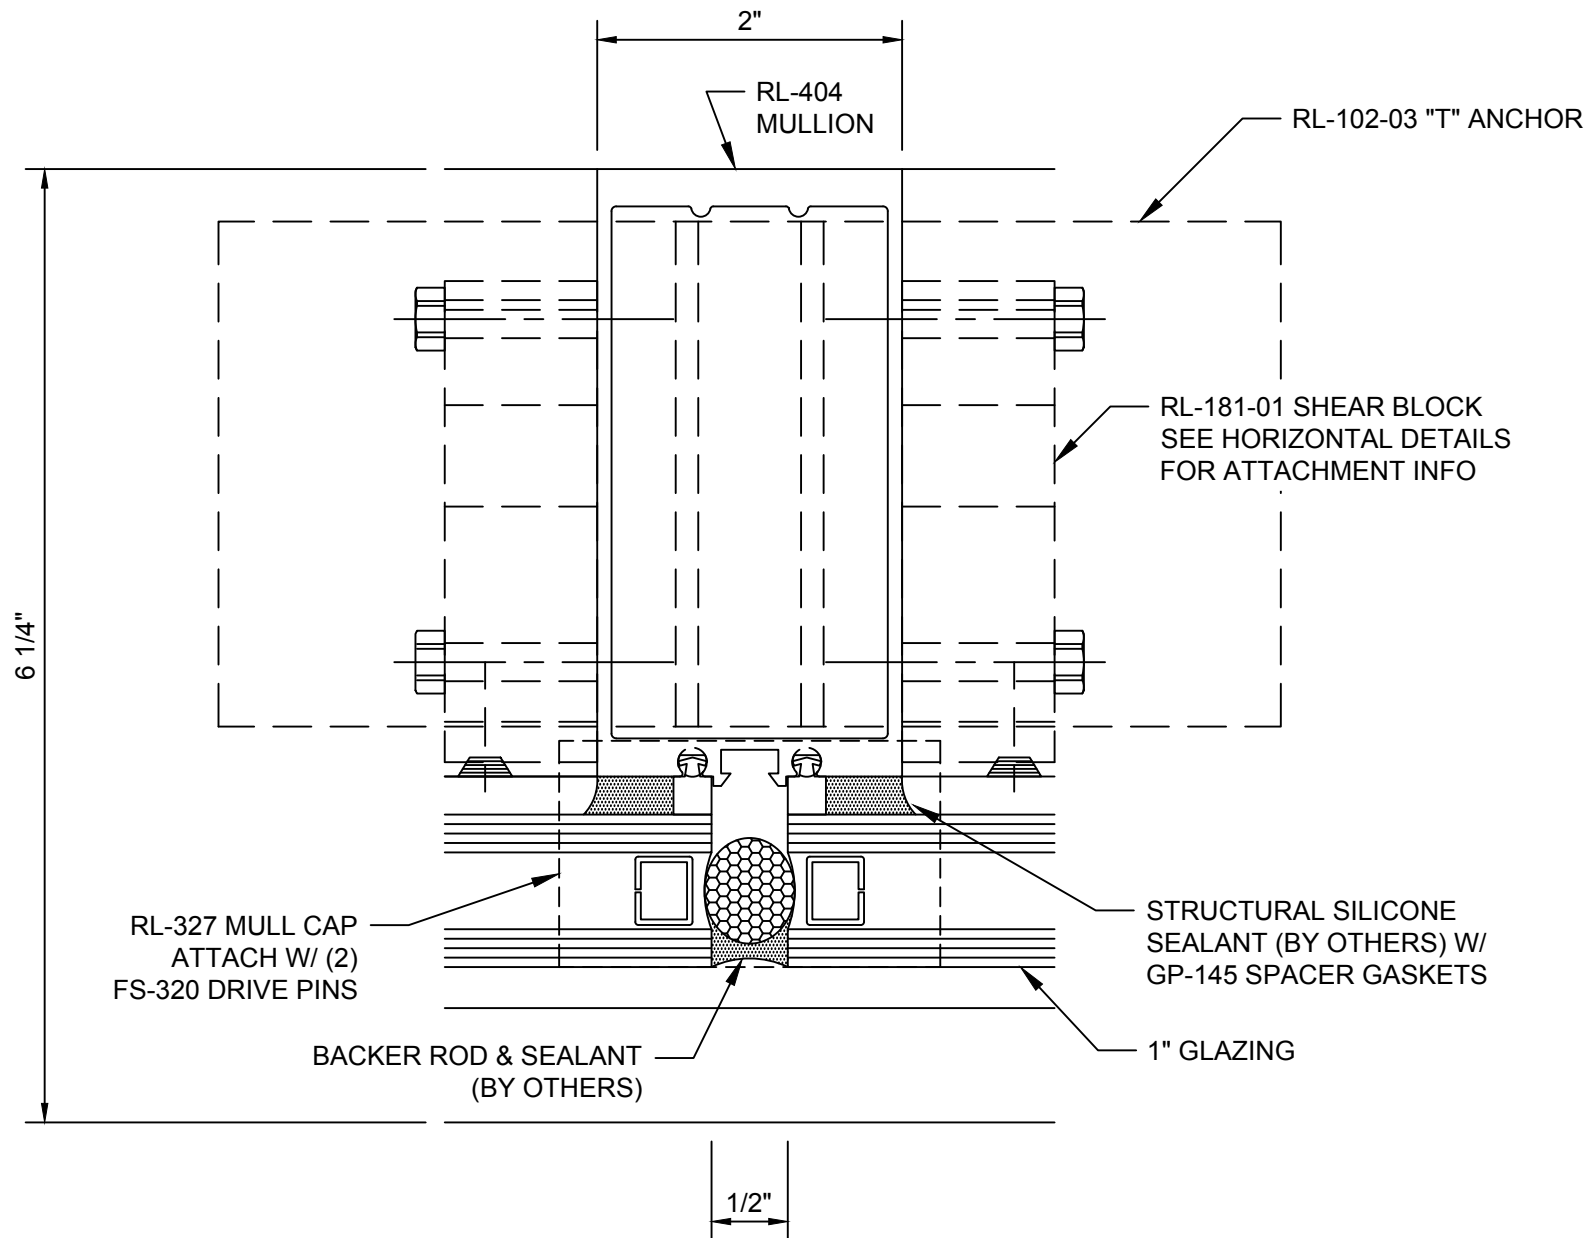


**Reliance™-LT**  
**SSG Vertical Mullion - V5053**



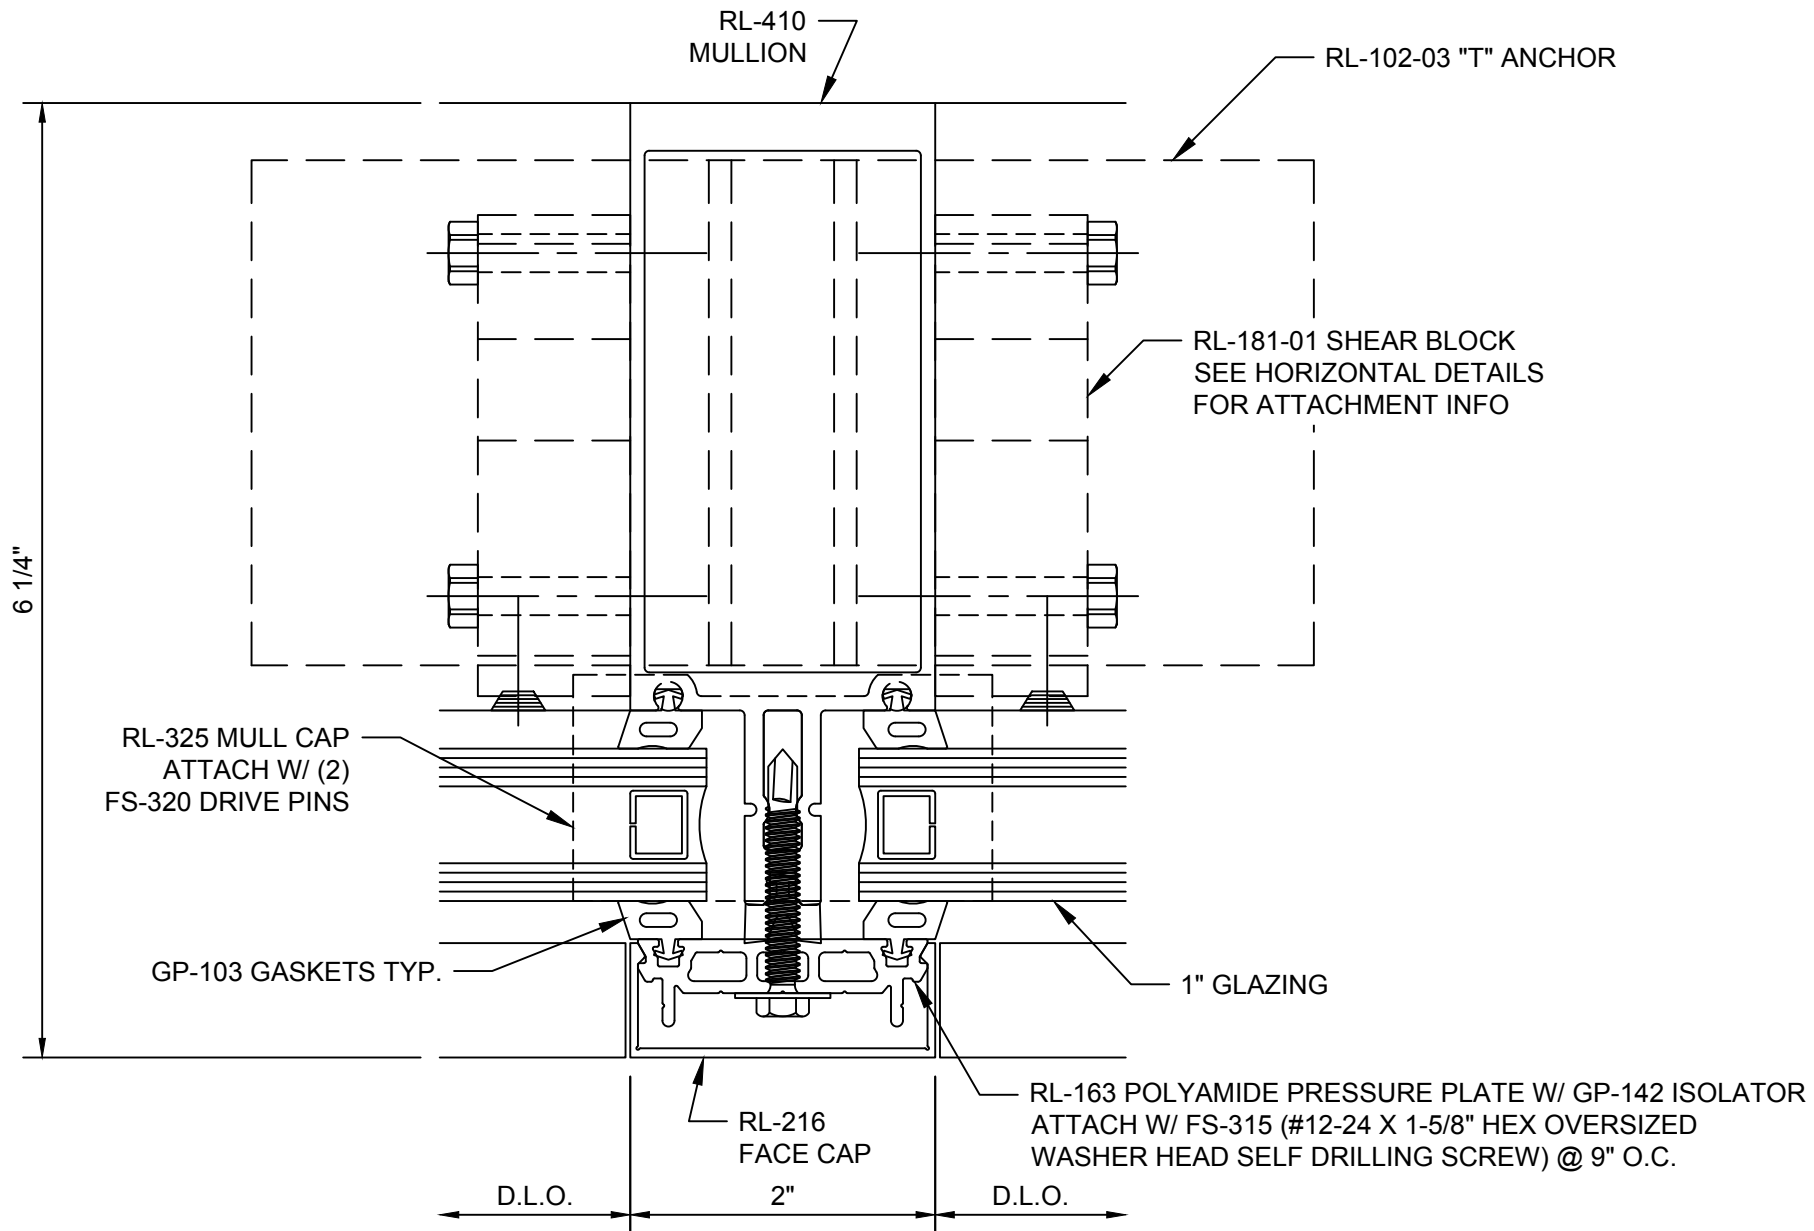


## Reliance™-LT Heavy Mullion - V5055

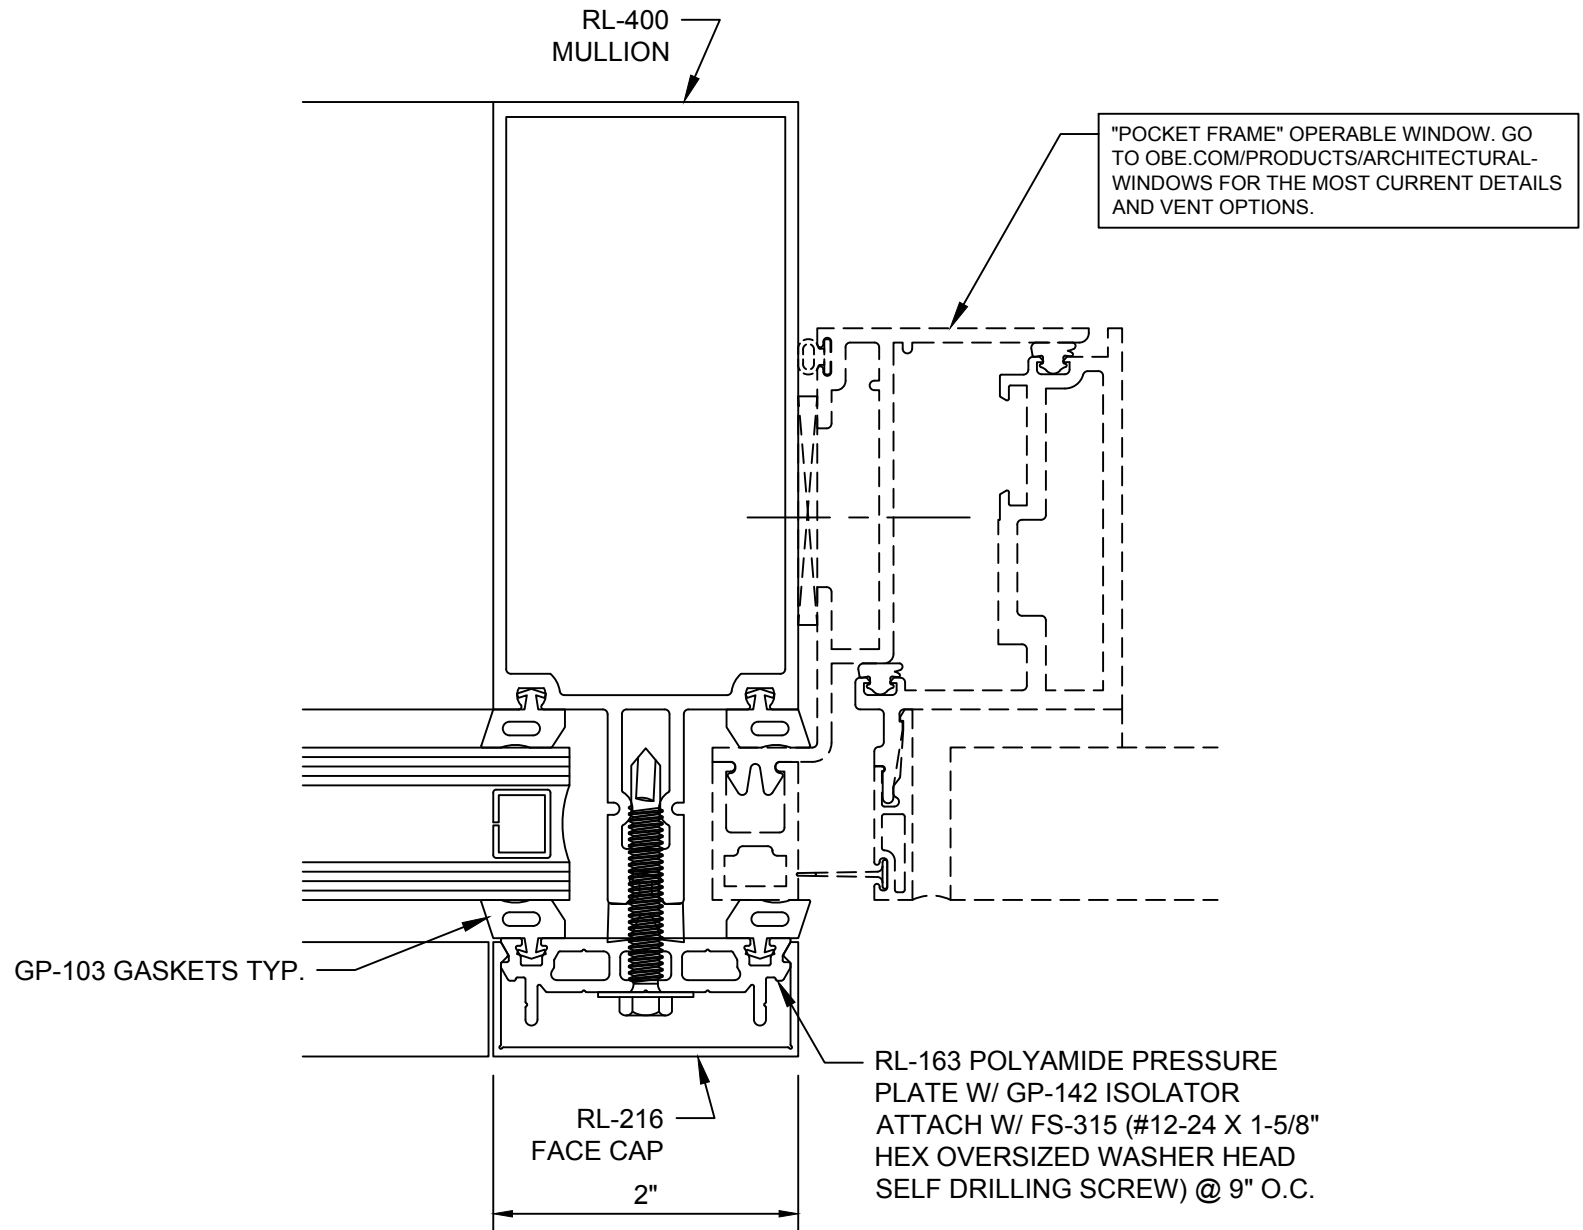


## Reliance™-LT Mullion at Operable Window - V5058



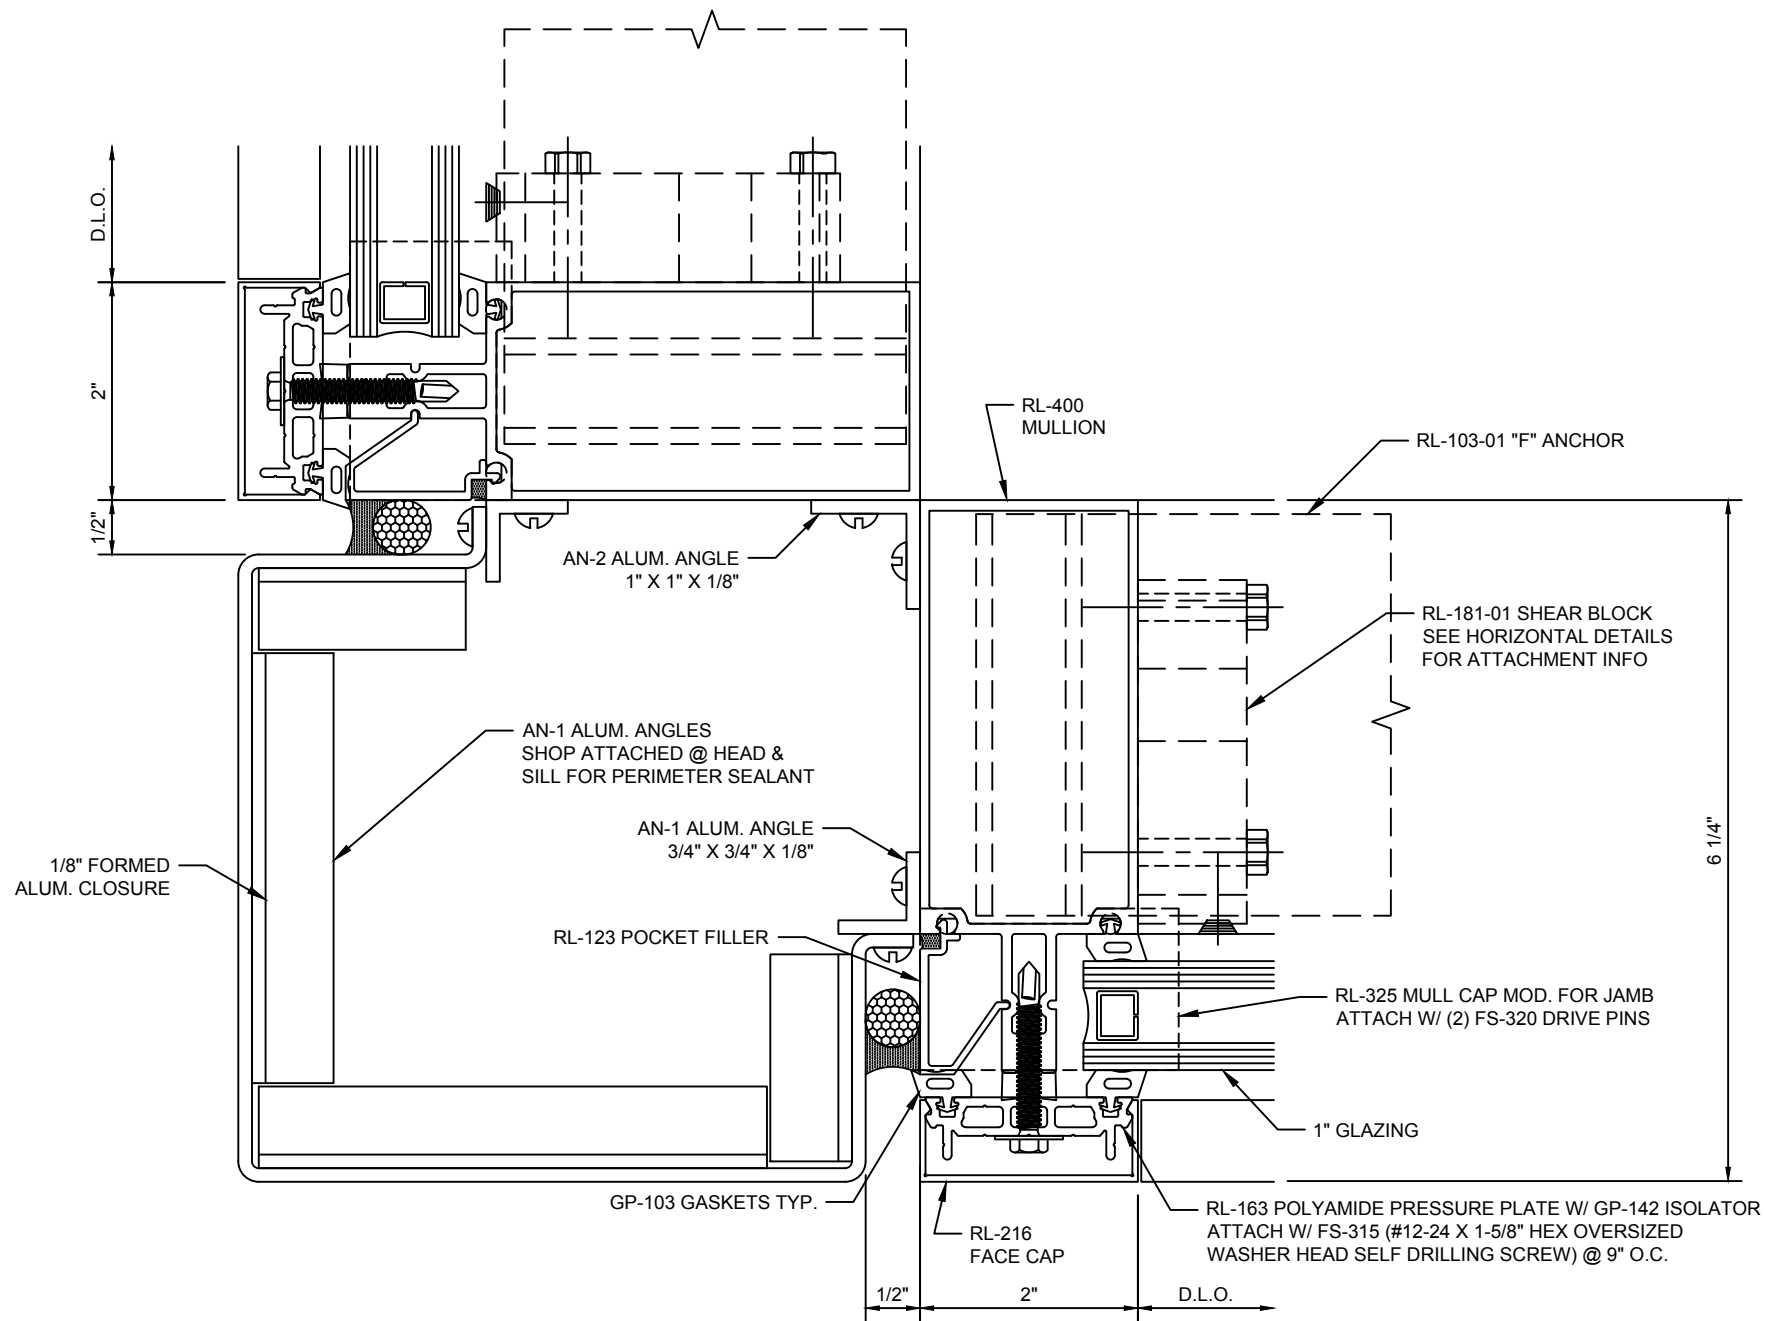


## Reliance™-LT


### 90° Outside Corner - V5065

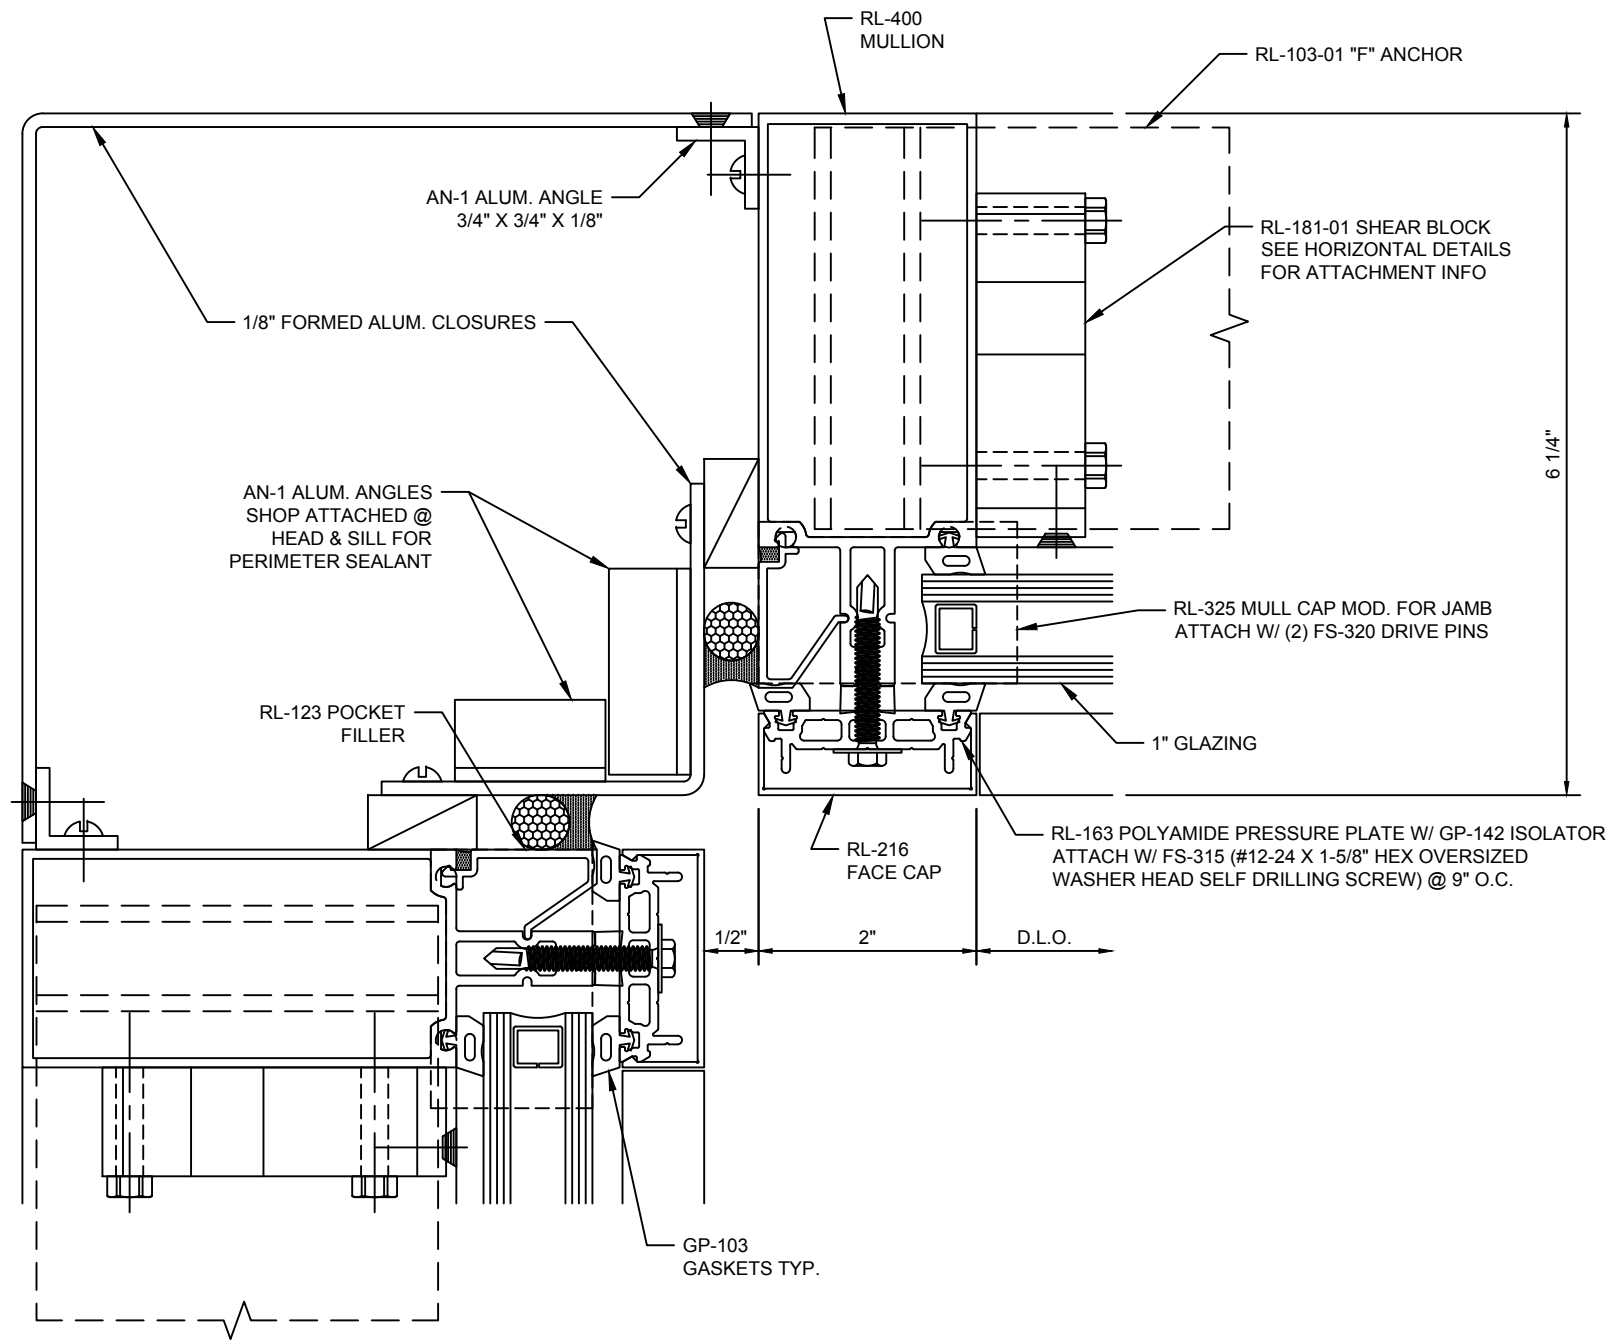


**Reliance™-LT**  
**90° Inside Corner - V5066**

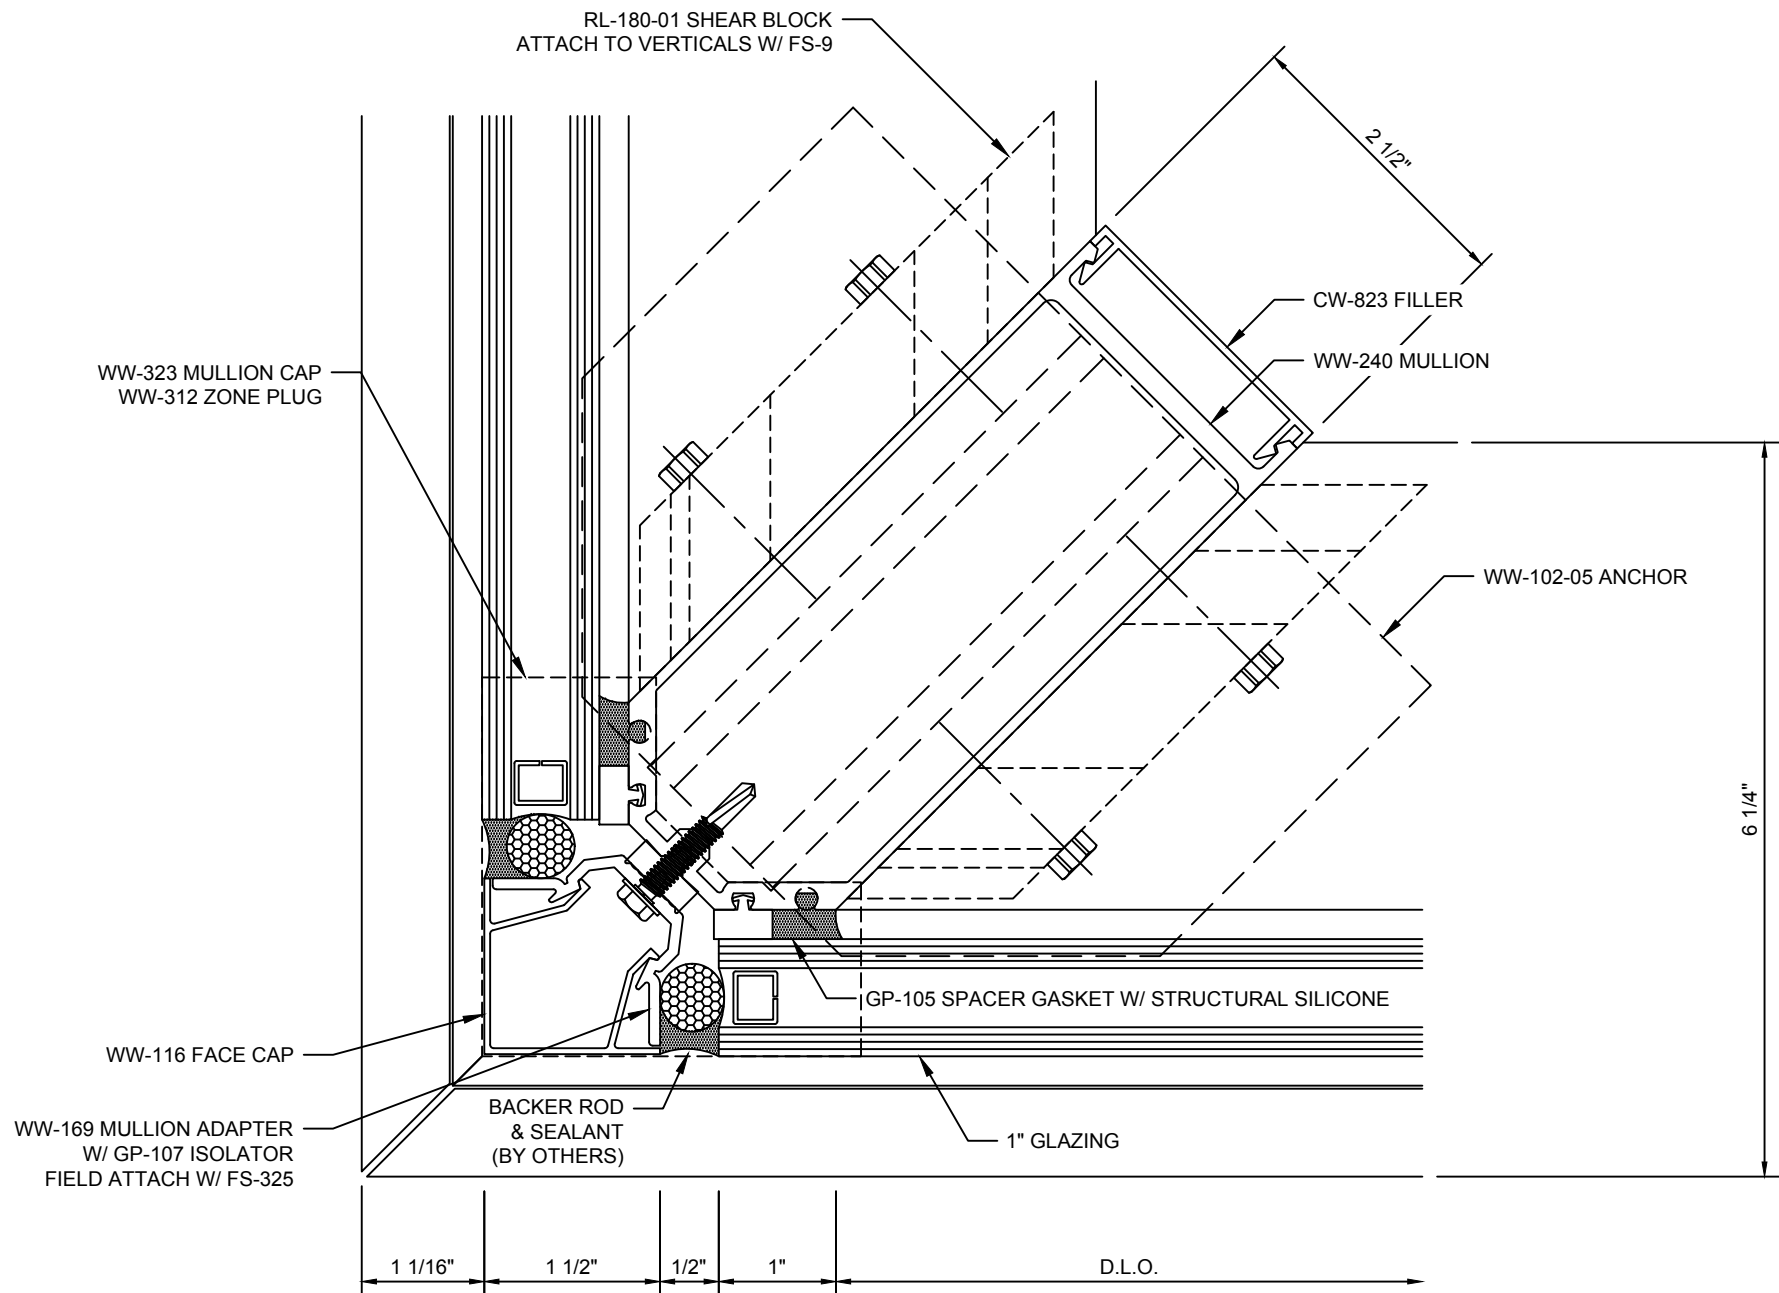

**Reliance™-LT**  
**90° SSG Corner at Vision - V5067**

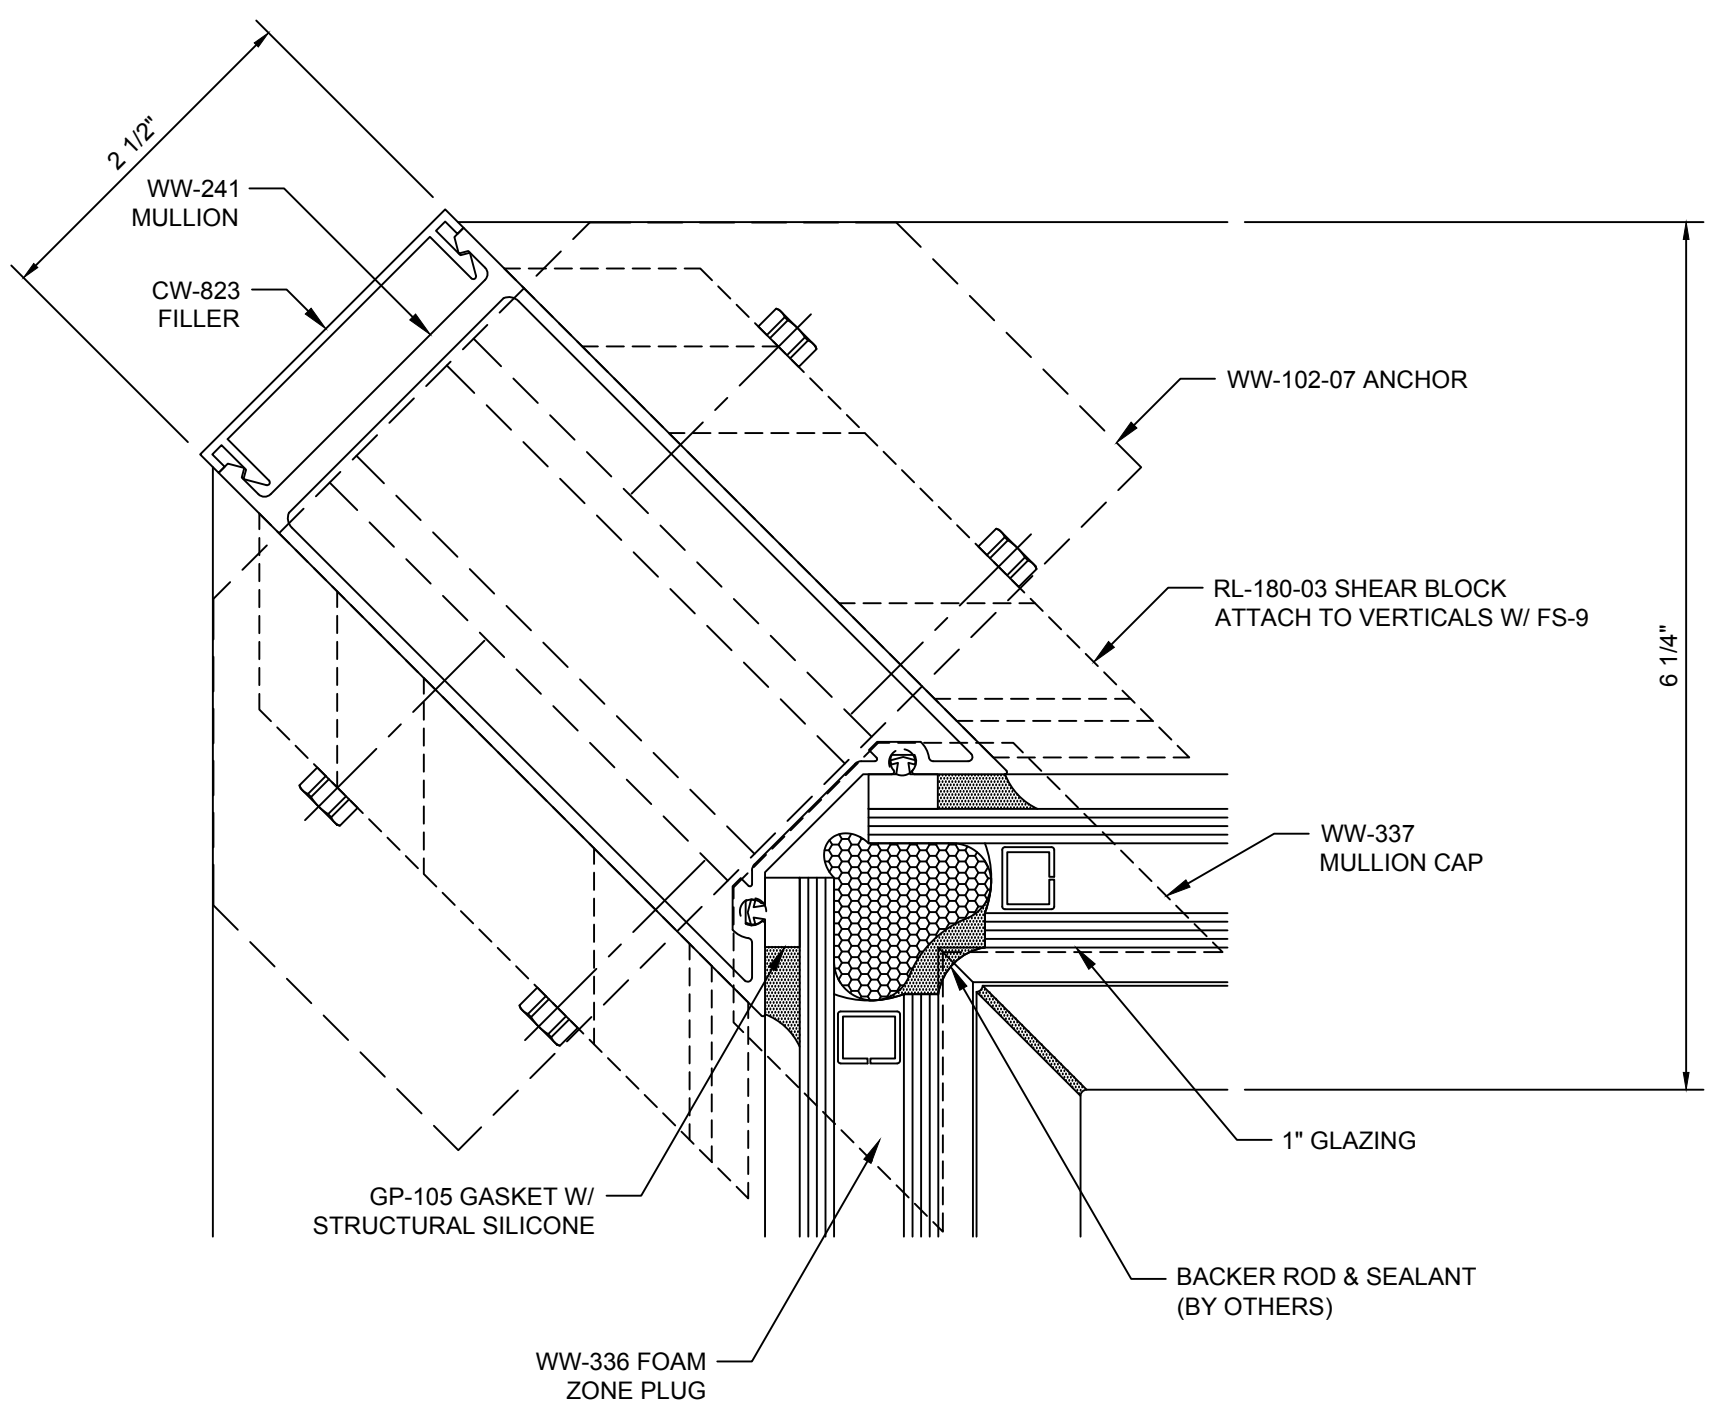

**Reliance™-LT**  
**90° SSG Inside Corner at Vision - V5068**

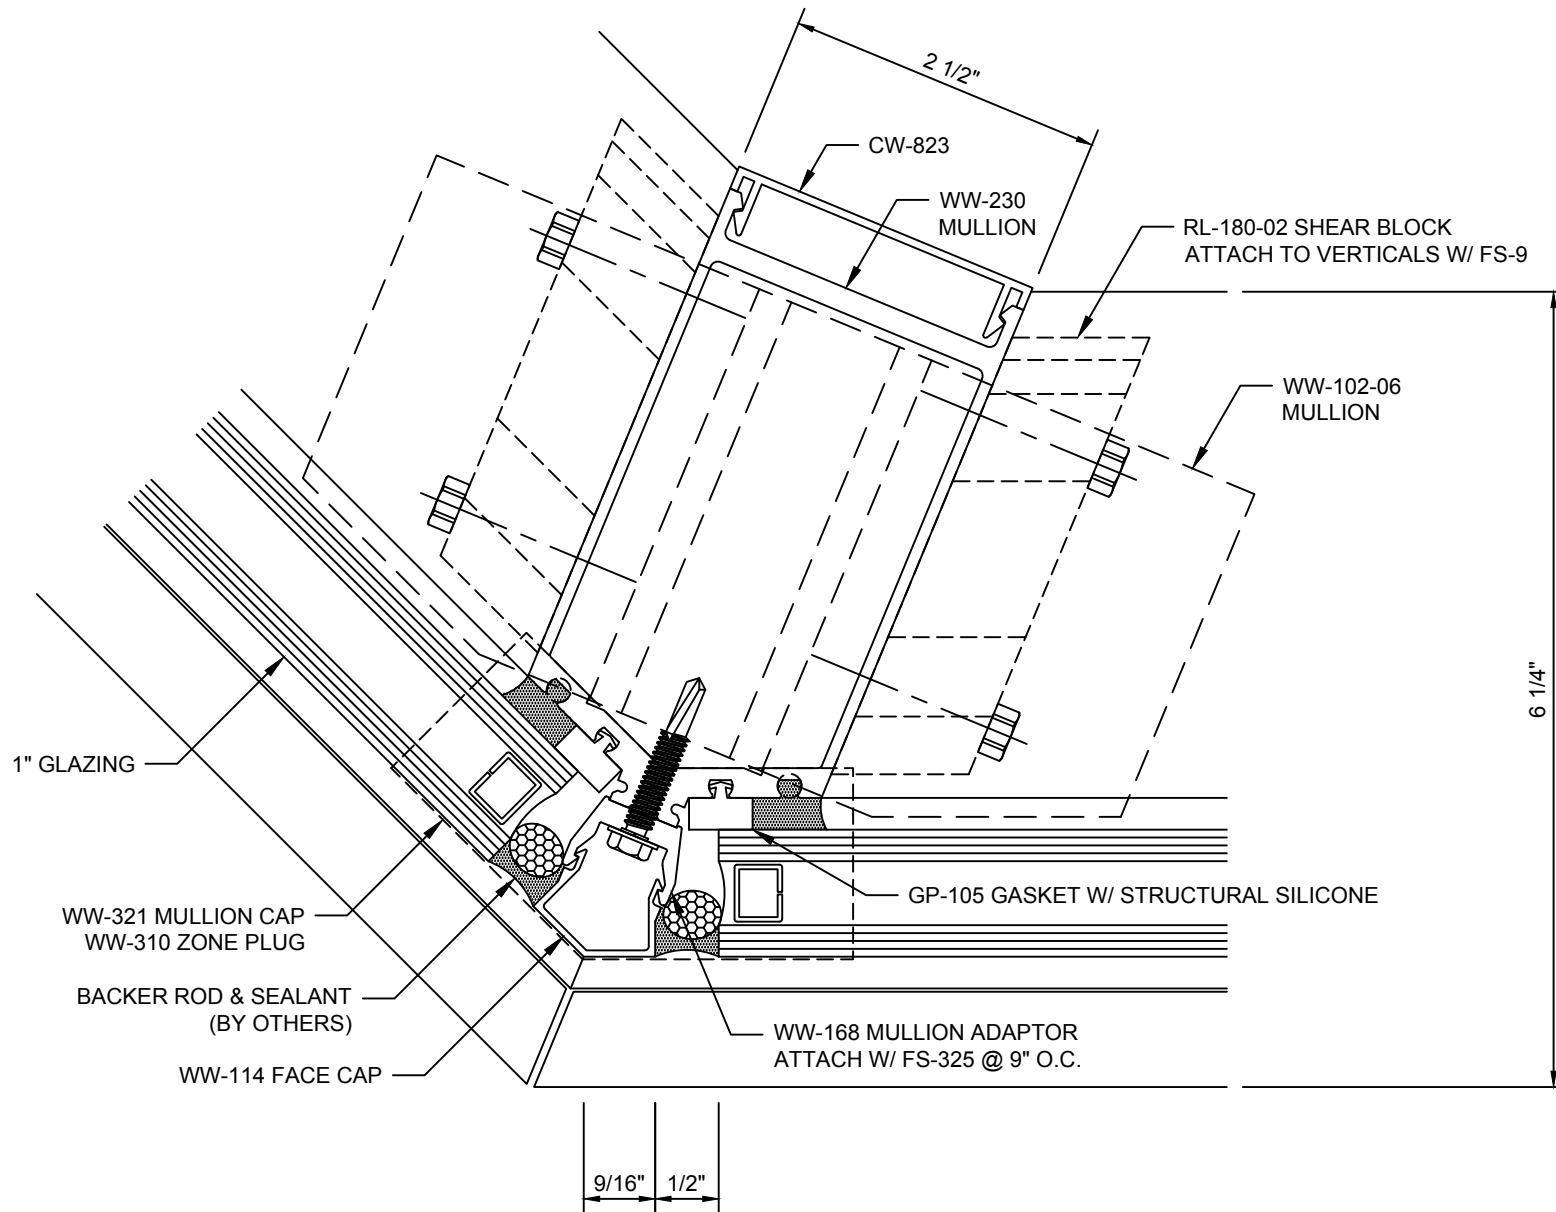

**Reliance™-LT**  
**135° SSG Outside Corner at Vision - V5069**